

Canon



www.canon.com/calcmanual

SCIENTIFIC CALCULATOR

F-570SG

User instruction



E-IE-483

ENGLISH

CONTENTS


| | |
|--|-------------|
| Advice and Precautions | P.2 |
| How to Use the Slide Cover | P.2 |
| Display (2-Line Display) | P.3 |
| To Get Start | |
| Power On, Off | P.4 |
| Input Capacity | P.4 |
| Mode Selection | P.5 |
| Display Formals Setting | P.6 |
| Input Editing | P.6 |
| Replay, Copy and Multi-statements | P.7 |
| Calculation Stacks | P.8 |
| Calculation Accuracy, Input Ranges | P.9 |
| Order of Operations | P.11 |
| Error Messages and Error Locator | P.12 |
| Before Using the Calculator | P.13 |
| Basic Calculations | |
| Arithmetic Calculations | P.14 |
| Memory Calculations | P.15 |
| Fraction Operations | P.16 |
| Percentage Calculations | P.17 |
| Degree-Minutes-Seconds Calculations | P.18 |
| Constant Value Calculations | P.19 |
| Metric Conversions | P.23 |
| Engineering Notation Calculations | P.24 |
| Fix, Sci, Norm, Round | P.25 |
| Functional Scientific Calculations | |
| Square, Root, Cube, Cube Root, Power, Power Root, Reciprocal and Pi | P.26 |
| Angle Unit Conversion | P.27 |
| Trigonometry Calculations | P.27 |
| Logarithm, Natural Logarithm, Antilogarithm and $\text{Log}_a b$ | P.28 |
| Coordinate Conversion | P.29 |
| Complex Number Calculations | P.29 |
| Base-n Calculations and Logical Calculations | P.31 |
| Statistical Calculations | P.33 |
| Standard Deviation | P.34 |
| Regression Calculations | P.34 |
| Distribution Calculations | P.38 |
| Permutation, Combination, Factorials and Random Number Generation | P.39 |
| Equation Calculations | P.40 |
| Solve Function | P.43 |
| CALC Function | P.44 |
| Differential Calculations | P.45 |
| Integration Calculations | P.46 |
| Matrix Calculations | P.47 |
| Vector Calculations | P.51 |
| Battery Replacement | P.55 |
| Specifications | P.56 |

ADVICE AND PRECAUTIONS


- This calculator contains precision components such as LSI chips and should not be used in place subject to rapid variations in temperature, excessive humidity dirt or dust, or exposed to direct sunlight.
- The liquid crystal display panel is made of glass and should not be subjected to excessive pressure.
- When cleaning the device do not use a damp cloth or a volatile liquid such as paint thinner. Instead, use only a soft, dry cloth.
- Do not under any circumstances dismantle this device. If you believe that the calculator is not functioning properly, either bring or mail the device together with the guarantee to the service representative of a Canon business office.

HOW TO USE THE SLIDE COVER

Open or close the cover by sliding as shown in the figure.




OPEN



CLOSE

DISPLAY (2-LINE DISPLAY)

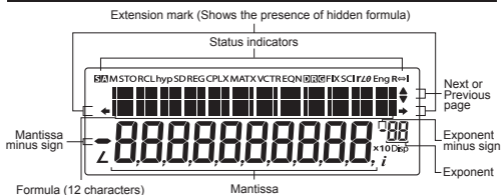

<Status Indicators>

- S** : Shift key
- A** : Alpha key
- M** : Independent memory
- STO** : Store Memory
- RCL** : Recall Memory
- hyp** : Hyperbolic key
- SD** : Statistic Mode
- REG** : Regression Mode
- CPLX** : Complex Number Calculation Mode
- MATX** : Matrix Calculation Mode
- VCTR** : Vector Calculation Mode
- EQN** : Equation Calculation Mode
- D** : Degree Mode
- R** : Radian Mode
- G** : Gradient Mode
- FIX** : Fixed-decimal Setting
- SCI** : Scientific Notation
- Eng** : Engineering Notation
- r∠θ** : Polar Coordinate
- ∠** : Angle value
- R↔I** : Switch between Real and Imaginary Number
- i** : Imaginary number
- Disp** : Multi-statements Display
- ▲ : Up Arrow
- ▼ : Down Arrow

TO GET START

Power ON, OFF

■ First time operation:

1. Remove the battery insulation tab to load the battery.
2. Press $\overset{\text{ON/CA}}{\square}$ $\overset{\text{Shift}}{\square}$ $\overset{\text{CLR}}{\square}$ \square \square $\overset{\text{ON/CA}}{\square}$ to initialize the calculator.

$\overset{\text{ON/CA}}{\square}$ **(Power ON/Clear):** Turns on the calculator when it is pressed.

$\overset{\text{Shift}}{\square}$ $\overset{\text{OFF}}{\square}$ **(Power OFF):** Turns off the calculator when it is pressed.

■ Auto Power Off Function:

When the calculator is not used for about 7 minutes, the calculator will automatically power off. In such a case, pressing $\overset{\text{ON/CA}}{\square}$ key powers the calculator on again.

Input Capacity

F-570SG allows you to input a single calculation up to 79 steps. One step is used as each time you press one of the numeric keys, arithmetic keys, scientific calculation keys or Ans key. $\overset{\text{Shift}}{\square}$, $\overset{\text{Alpha}}{\square}$, $\overset{\text{MODE}}{\square}$ and the direction keys will not use up any step.

Starting from the 72nd step, the cursor changes from [_] to [■] that notifying the memory is running low. In case you need to input a single calculation with more than 79 steps, you should separate your calculation into two or more segments.

MODE Selection

Press MODE \square to start the calculation mode selection with the following display:



When pressing \leftarrow \rightarrow or MODE \square , you can access the next (or previous) mode selection page.

The following table shows the mode selection menu:

| Operation | Mode | LCD Indicator |
|--|--------------------|---|
| MODE \square 1 MODE \square 2 | COMP CPLX | Normal Calculation Complex Number Calculation CPLX |
| MODE \square MODE \square 1 MODE \square MODE \square 2 MODE \square MODE \square 3 | SD REG BASE | Statistical Calculation Regression Calculation Base-n Calculation SD REG d / h / b / o |
| MODE \square MODE \square MODE \square 1 MODE \square MODE \square MODE \square 2 MODE \square MODE \square MODE \square 3 | EQN MAT VCT | Equation Calculation Matrix Calculation Vector Calculation EQN MATX VCTR |
| MODE \square MODE \square MODE \square MODE \square 1 MODE \square MODE \square MODE \square MODE \square 2 MODE \square MODE \square MODE \square MODE \square 3 | Deg Rad Gra | Degree Radian Gradient D R G |
| MODE \square \leftarrow \leftarrow 1 MODE \square \leftarrow \leftarrow 2 MODE \square \leftarrow \leftarrow 3 | Fix Sci Norm | Fixed-decimal Setting Scientific Notation Exponential Notation FIX SCI |
| MODE \square \leftarrow 1 | Disp ^{*1} | Display Setup Selection |

*1 Display Setup Selection options

First page : Press \square **1** [EngON] or \square **2** [EngOFF] for engineering symbols on or off.

\rightarrow : Press \square **1** [ab/c] or \square **2** [d/c] to specify mixed fraction or improper fraction display.

\rightarrow \rightarrow : Press \square **1** [Dot] or \square **2** [Comma] to specify decimal point or 3-digits separator symbols.

\square **1** [Dot] : The decimal point is indicated by dot and the 3-digits separator is indicated by comma.

\square **2** [Comma] : The decimal point is indicated by common and the 3-digits separator is indicated by dot.

• To check or clear the calculation mode, refer page 13.

Display Formats Setting

F-570SG can display a result up to 10 digits. Results exceed the digit limit will be automatically displayed by exponential notation format.

Example : Change the display formats for 1.23×10^{-03}


| Display Setting | Operation | Display (Lower) |
|-------------------------------|--|--------------------------|
| Default setting : | 1 2 3 X | |
| Norm 1, EngOFF | . 0 0 0 | |
| Scientific Notation : | 0 1 = | 1.23×10^{-03} |
| "5" significant digits | MODE < < 2 5 | 1.2300×10^{-03} |
| Exponential Notation : Norm 2 | MODE < < 3 2 | 0.00123 |
| Fixed decimal places : "7" | MODE < < 1 7 | 0.0012300 |

* For Norm 1 and Norm 2, refer page 25.

Example : $1.23 \times 10^{-03} = 1.23 \text{ m (milli)}$

| Display Setting | Operation | Display |
|-------------------------------------|------------------------------------|-----------------------|
| Engineering Symbols : On | MODE < 1 1 | 123x.00001 m 1.23 |
| Display without engineering symbols | Shift <ENG | 123x.00001 0.00123 |

Input Editing





New input begins on the left of the upper (entry) line. As the entries are more than 12 digits, the line will scroll to the right consecutively. Press **<** **>** to scroll the cursor within the upper (entry) line and you can perform input editing as needed.

Example (under editing): 1234567 **+** 889900






Replacing an entry (1234567 → 1234560)

| Display Setting | Operation | Display (Upper) |
|---|-------------|-------------------------|
| Press or keep pressing until "7" blinks | < | 123456 <u>7</u> +8899 → |
| Replace with "0" | 0 | 123456 <u>0</u> +8899 → |

Deletion (1234560 → 134560)









| Display Setting | Operation | Display (Upper) |
|---|---|-------------------------|
| Press or keep pressing until "2" blinks |  | 12 <u>3</u> 4560+8899 → |
| "2" is deleted |  | 1 <u>3</u> 4560+88990 → |

Insertion (889900 → 2889900)



| Display Setting | Operation | Display (Upper) |
|--|---|-------------------------|
| Press or keep pressing until "8" blinks |  | 134560+ <u>8</u> 8990 → |
| "8" and  blinks alternately |   | 134560+ <u>8</u> 8990 → |
| Insert "2", "8" still blinking |  | 134560+2 <u>8</u> 899 → |

Replay, Copy and Multi-statements

Replay

- Replay memory capacity is 128 bytes that can store calculation expressions and results.
- After the calculation is executed, the calculation expression and its result will be stored in the replay memory automatically.
- Pressing  (or ) can replay the performed calculation expressions and results.
- Replay memory is cleared when you.
 - i) Initialize calculator setting by    (or )  .
 - ii) Change from one calculation mode to another.

Copy

- Press   after replayed the previous calculation expressions (statements) can make a multi-statement with the current calculation expression.

Multi-statements

- You can put two or more calculation expressions together by using a colon \square .
- The first executed statement will have [Disp] indicator; and the [Disp] icon will disappeared after the last statement is being executed.

Example :

| Operation | Display (Upper line) | Display (Lower Line) |
|---|----------------------|----------------------|
| \square \square \square \square \square | 8 + 9 | 17. |
| \square \square \square \square \square \square \square \square \square \square | 5 x 2 | 10.Disp |
| \square \square \square \square \square | Ans + 6 | 16. |
| \square \square \square \square \square \square \square \square \square \square | 9 : 5 x 2 : Ans + 6 | 17. |
| \square \square \square \square \square | 8 + 9 | 17.Disp |
| \square \square \square \square \square | 5 x 2 | 10.Disp |
| \square \square \square \square \square | Ans + 6 | 16. |

Calculation Stacks

- This calculator uses memory areas, called "stacks", to temporarily store numeric value (numbers) and commands (+ - x ...) according to their precedence during calculations.
- The numeric stack has 10 levels and the command stack has 24 levels. A stack error [Stack ERROR] occurs whenever you try to perform a calculation that exceeds the capacity of stacks.
- Matrix calculations use up to two levels of the matrix stack. Squaring a matrix, cubing a matrix, or inverting a matrix uses one stack level.
- Calculations are performed in sequence according to "Order of Operations". After the calculation is performed, the stored stack values will be released.

Calculation Accuracy, Input Ranges

Internal digits: Up to 16

Accuracy*: As a rule, accuracy is ± 1 at the 10th digit.

Output ranges: $\pm 1 \times 10^{-99}$ to $\pm 9.999999999 \times 10^{99}$

| Function | Input Range | |
|--|---|--|
| sin x | Deg | $0 \leq x < 9 \times 10^9$ |
| | Rad | $0 \leq x < 157079632.7$ |
| | Grad | $0 \leq x < 1 \times 10^{10}$ |
| cos x | Deg | $0 \leq x < 9 \times 10^{10}$ |
| | Rad | $0 \leq x < 157079632.7$ |
| | Grad | $0 \leq x < 1 \times 10^{10}$ |
| tan x | Deg | Same as sinx, except when $ x = (2n-1) \times 90$ |
| | Rad | Same as sinx, except when $ x = (2n-1)\pi/2$ |
| | Grad | Same as sinx, except when $ x = (2n-1)100$ |
| sin ⁻¹ x cos ⁻¹ x | $0 \leq x \leq 1$ | |
| tan ⁻¹ x tanhx | $0 \leq x \leq 9.999999999 \times 10^{99}$ | |
| sinhx coshx | $0 \leq x \leq 230.2585092$ | |
| sinh ⁻¹ x | $0 \leq x \leq 4.999999999 \times 10^{99}$ | |
| cosh ⁻¹ x | $1 \leq x \leq 4.999999999 \times 10^{99}$ | |
| tanh ⁻¹ x | $0 \leq x \leq 9.999999999 \times 10^{-1}$ | |
| logx lnx | $0 < x \leq 9.999999999 \times 10^{99}$ | |
| 10 ^x | $-9.999999999 \times 10^{99} \leq x \leq 99.99999999$ | |
| e ^x | $-9.999999999 \times 10^{99} \leq x \leq 230.2585092$ | |
| \sqrt{x} | $0 \leq x < 1 \times 10^{100}$ | |
| X ² | $ x < 1 \times 10^{50}$ | |
| X ³ | $ x \leq 2.15443469 \times 10^{33}$ | |
| X ⁻¹ | $ x < 1 \times 10^{100}; x \neq 0$ | |
| $\sqrt[3]{x}$ | $ x < 1 \times 10^{100}$ | |
| X! | $0 \leq x \leq 69$ (x is an integer) | |

| Function | Input Range |
|-------------------------------|--|
| nPr | $0 \leq n < 1 \times 10^{10}$, $0 \leq r \leq n$ (n, r are integers) $1 \leq \{n!/(n-r)!\} \leq 1 \times 10^{100}$ |
| nCr | $0 \leq n < 1 \times 10^{10}$, $0 \leq r \leq n$ (n, r are integers) $1 \leq n!/r! \leq 1 \times 10^{100}$ or $1 \leq n!/(n-r)! < 1 \times 10^{100}$ |
| Pol(x,y) | $ x , y \leq 9.999999999 \times 10^{99}$ $\sqrt{x^2+y^2} \leq 9.999999999 \times 10^{99}$ |
| Rec(r, θ) | $0 \leq r \leq 9.999999999 \times 10^{99}$ θ : Same as sinx, cosx |
| $\circ \cdot \prime \prime$ | $ a , b, c < 1 \times 10^{100}$ $0 \leq b, c$ |
| $< \circ \cdot \prime \prime$ | $ x < 1 \times 10^{100}$ Decimal \leftrightarrow Sexagesimal Conversions $0^\circ 0' 0'' \leq x \leq 999999^\circ 59' 59''$ |
| $\wedge(x^y)$ | $x > 0$: $-1 \times 10^{100} < y \log x < 100$ $x = 0$: $y > 0$ $x < 0$: $y = n, m/(2n+1)$, (m, n are integers), However: $-1 \times 10^{100} < y \log x < 100$ |
| $^x\sqrt{y}$ | $y > 0$: $x \neq 0$, $-1 \times 10^{100} < 1/x \log y < 100$ $y = 0$: $x > 0$ $y < 0$: $x = 2n+1, (2n+1)/m$ ($m \neq 0$; m, n are integers) |
| a^b/c | Total of integer, numerator, and denominator must be 10 digits or less (including division marks). |
| I~Rand(a,b) | $0 \leq a < 1 \times 10^{10}$, $0 \leq b < 1 \times 10^{10}$ (a,b should be positive integers or 0) |
| Rand | Result generates a 3 digit pseudo random number (0.000~0.999) |
| Single-variable | $ x < 1 \times 10^{100}$ $ \text{FREQ} < 1 \times 10^{100}$ |
| Paired-variable | $ x < 1 \times 10^{100}$ $ y < 1 \times 10^{100}$ $ \text{FREQ} < 1 \times 10^{100}$ |
| ABS | $ x < 1 \times 10^{100}$ |
| BIN | Positive : 0~0111 1111 1111 1111 1111 1111 1111 1111 Negative : 1000 0000 0000 0000 0000 0000 0000 0000~ 1111 1111 1111 1111 1111 1111 1111 1111 |
| DEC | Positive : 0 ~ 2147483647 Negative : -2147483647 ~ -1 |
| OCT | Positive : 0 ~ 177 7777 7777 Negative : 200 0000 0000 ~ 377 7777 7777 |
| HEX | Positive : 0 ~ 7FFF FFFF Negative : 8000 0000 ~ FFFF FFFF |

*For a single calculation, the calculation error is ± 1 at the 10th digit. For exponential display, calculation error is ± 1 at the last significant digit. Errors are cumulative in the case of consecutive calculations, which can cause them to become larger. (This is also true as internal consecutive calculations are performed in the case of xy , $^x\sqrt{y}$, $x!$, nPr , nCr , etc.). In the vicinity of a function's singular point and point of inflection, errors are cumulative and may become large.

Order of Operations

The calculator will automatically determine the operation priority. This means that algebraic expressions can be entered just as they are written and the calculation priority is as follows:

| | |
|--------------|---|
| 1st Priority | Recall memory (A - F, X, Y), Rand |
| 2nd | Calculation within parentheses () |
| 3rd | Function with parentheses that requests the input argument to the right Pol(, Rec(, Abs(, i~Rand(, log _{ab} (, d/dx, $\int dx$, P(, Q(, R(, Statistic points: Max, Min, Med |
| 4th | Functions that come after the input value preceded by values, powers, power roots : x^2 , x^3 , x^{-1} , $x!$, $^{\circ}$, $^{\circ}$, $^{\circ}$, r, g, Statistical estimated value calculation: \hat{x} , \hat{y} , $\hat{x}1$, $\hat{x}2$, $\blacktriangleright t$ Percent %, EXP Engineering symbols (T, G, M, k, m, μ , n, p, f) metric conversion commands (cm \rightarrow in, etc) |
| 5th | $^{\wedge}$, $^{\sqrt{x}}$ |
| 6th | Fractions: a b/c, d/c |
| 7th | Prefix symbol: (-) (negative sign), Base-n symbols (d, h, b, o, Neg, Not) |
| 8th | Multiplication where sign is omitted: Multiplication sign omitted immediately before π , e, variables (2π , $5A$, πA , etc.) |
| 9th | Function that come before the input value without parentheses. sin, cos, tan \sin^{-1} , \cos^{-1} , \tan^{-1} , sinh, cosh, tanh, \sinh^{-1} , \cosh^{-1} , \tanh^{-1} , log, ln, e^{\wedge} , 10^{\wedge} , $\sqrt{\quad}$, $\sqrt[3]{\quad}$, Arg, Conjg, Det, Trn |
| 10th | Permutations, combinations: nPr, nCr Complex number polar coordinate symbol (\angle) |
| 11th | Dot: . |
| 12th | Multiplication and division: \times , \div |
| 13th | Addition and subtraction: +, - |
| 14th | Logical AND (and) |
| 15th | Logical OR, XOR, XNOR (or, xor, xnor) |
| 16th | Calculation ending instruction: =, M+, M- STO(store memory), $\blacktriangleright r < \Theta$, $\blacktriangleright a+bi$ |

Operations of the same precedence are performed from right to left. For example: $e^x \ln \sqrt{120} \rightarrow e^x \{\ln(\sqrt{120})\}$. Other operations are performed from left to right

Operations enclosed with parentheses are performed first. When a calculation contains an argument that is a negative number, the negative number must be enclosed within parentheses.

Example: $(-2)^4 = 16$; and $-2^4 = -16$

Error Messages and Error Locator

The calculator is locked up while an error message is shown on the display to indicate the cause of the error.

- Press $\boxed{\text{ON/CA}}$ to clear the error, or
- Press \leftarrow or \rightarrow to display the calculation with the cursor positioned under the error and you can correct it accordingly.

| Error Message | Cause | Action |
|---------------------|---|--|
| Math ERROR | <ul style="list-style-type: none"> • Calculation result is outside the allowable calculation range • An attempt to perform a calculation using a value that exceeds the allowable input range. • An attempt to perform an illogical operation (division by zero, etc.) | <ul style="list-style-type: none"> • Check your input values and make sure they are all within the allowable ranges. Pay special attention to values in any memory areas you are using. • Press \leftarrow or \rightarrow to display the calculation with the cursor located at the location of the error and make required corrections. |
| Stack ERROR | The capacity of the numeric stack or operator stack is exceeded. | Simplify the calculation. The numeric stack has 10 levels and the operator stack has 24 levels. Divide your calculation into two or more separate parts. |
| Syntax ERROR | An attempt to perform an problematic format of the calculation | Press \leftarrow or \rightarrow to display the calculation with the cursor located at the location of the error and make required corrections. |

| Error Message | Cause | Action |
|--------------------|--|---|
| Arg ERROR | Improper use of an argument. | Press \leftarrow or \rightarrow to display the location of the cause of an error and make required corrections. |
| Dim ERROR | <ul style="list-style-type: none"> Under Matrix and Vector mode, the dimension (row, column) over three. An attempt to perform an illegal matrix/vector operation. | Press \leftarrow or \rightarrow to display the location of the cause of an error and make required corrections. |
| Solve ERROR | Can't get the result by solve function. | Press \leftarrow or \rightarrow to display the location of the cause of an error and make required corrections. |

Before Using the Calculator

■ Check the current Calculation Mode

Be sure to check the status indicators that indicate the current calculation mode (CPLX, SD... etc) and angle unit setting (Deg, Rad Gra) before starting a calculation.

■ Return Calculation Mode to the initial setup

You can return the calculation mode to the initial default by pressing

Shift CLR $\boxed{2}$ (Mode) $\boxed{=}$ ON/CA

Calculation Mode : COMP

Angle Unit : Deg

Exponential Display Format : Norm 1, Eng Off

Complex Number Display Format : a+bi

Fraction Display Format : a b/c

Decimal Point Character : Dot

, and this action will not clear the variable memories.

■ Initialize the Calculator

When you are not sure the current calculator setting, you are recommended to initialize the calculator (calculation mode "COMP", angle unit "Degree", and clear replay and variable memories) by performing the following key operations: Shift CLR $\boxed{3}$ (All) $\boxed{=}$ ON/CA .

BASIC CALCULATIONS

- Press MODE $\boxed{1}$ to enter COMP mode as you want to perform basic calculations.
- During the busy calculation, the calculator will display the message [PROCESSING].

Arithmetic Calculations

$\boxed{+}$ $\boxed{-}$ $\boxed{\times}$ $\boxed{\div}$

- To calculate the negative values (excludes the negative exponent), you have to enclose them with parentheses.
- To input the negative values, use $\boxed{(-)}$.

| Calculation Expression | Operation | Display (Result) |
|--|---|----------------------|
| $(-2.5)^2$ | $\boxed{(}$ $\boxed{(-)}$ $\boxed{2}$ $\boxed{\cdot}$ $\boxed{5}$ $\boxed{)}$ $\boxed{x^2}$ $\boxed{=}$ | 6.25 |
| $(4 \times 10^{75})(-2 \times 10^{-79})$ | $\boxed{4}$ $\boxed{\text{EXP}}$ $\boxed{7}$ $\boxed{5}$ $\boxed{\times}$ $\boxed{(-)}$ $\boxed{2}$ $\boxed{\text{EXP}}$ $\boxed{(-)}$ $\boxed{7}$ $\boxed{9}$ $\boxed{=}$ | -8×10^{-04} |

- This Calculator supports 24-level of parenthetical expression.
- You can omit the close parentheses $\boxed{)}$ as the calculation ends with $\boxed{=}$ or $\boxed{\text{M+}}$.

| Calculation Expression | Operation | Display (Result) |
|------------------------|--|------------------|
| $(\tan -45) \div (-2)$ | $\boxed{\tan}$ $\boxed{(-)}$ $\boxed{4}$ $\boxed{5}$ $\boxed{\div}$ $\boxed{(-)}$ $\boxed{2}$ $\boxed{=}$ | 0.5 |
| $\tan (-45 \div -2)$ | $\boxed{\tan}$ $\boxed{(}$ $\boxed{(-)}$ $\boxed{4}$ $\boxed{5}$ $\boxed{\div}$ $\boxed{(-)}$ $\boxed{2}$ $\boxed{=}$ | 0.414213562 |

- ! When the number of $\boxed{)}$ is more than $\boxed{(}$, [SYNTAX Error] will be shown.

Memory Calculations

Ans \square M \square M+ \square M- \square STO \square RCL

Memory Variables

- There are 8 memory variables (A through F, X and Y) which store data, results, or dedicated values.
- To store values into memory by pressing \square \square Shift \square STO + Memory variable.
- To recall memory values, press \square RCL + Memory variable.
- Memory content can be cleared by simply pressing \square 0 \square Shift \square STO + Memory variable.

Example: 23 + 7 (Store to A), calculate sin (memory A), and clear memory A

| Calculation Operation | Display (Upper Line) | Display (Lower Line) |
|---|----------------------|----------------------|
| \square 2 \square 3 \square + \square 7 \square Shift \square STO \square A | 23+7 \rightarrow A | 30. |
| \square sin \square RCL \square A \square = | sin A | 0.5 |
| \square 0 \square Shift \square STO \square A | 0 \rightarrow A | 0. |

Independent Memory

- Independent memory \square M uses the same memory area as variable M. It is convenient for calculating cumulative total by just pressing \square M+ (add to memory) or \square M- (subtract from memory); and the memory contents are retained even when the calculator is turned off.
- To clear independent memory (M), input \square 0 \square Shift \square STO \square M.

! When you want to clear all memory values, press \square Shift \square CLR \square 1 (Mcl) \square = \square ON/CA

Answer Memory

- The input values or the most recent calculation result will be automatically stored into Answer Memory whenever you press \square =, \square M+, \square Shift \square M-, \square RCL or \square Shift \square STO followed by a memory variables.
- If you continue with pressing an operator key (x^2 , x^3 , x^{-1} , $x!$, $\%$, $+$, $-$, \times , \div , DRG \blacktriangleright , \wedge , $\sqrt[x]{\square}$, nPr and nCr), the displayed value will be changed into [Ans] plus the operator key. Then, you can perform a new calculation with the latest Answer Memory.

| Calculation Operation | Display (Upper) | Display (Lower) |
|---|------------------|-----------------|
| \square 1 \square 2 \square 3 \square + \square 4 \square 5 | 123+456M+ | 579. |
| \square 6 \square M+ | | |
| \square x^2 \square = | Ans ² | 335,241. |

- You can recall and use the latest stored Answer Memory by pressing **Ans**.

| Calculation Operation | Display (Upper) | Display (Lower) |
|---|-----------------|-----------------|
| $7 \ 8 \ 9 \ 9 \ 0$ $0 \ - \text{Ans} \ =$ | 789900– Ans | 454,659. |

- ! Answer Memory is not updated as an error operation had been performed.

Fraction Operations

$\frac{a}{b/c}$ $\frac{d/c}{}$

The Calculator support Fraction Calculation and the conversions between Fraction, Decimal point, Mixed fraction and Improper fraction.

Fraction Calculation, Fraction \leftrightarrow Decimal point conversion

| Example | Operation | Display (Lower) |
|--|---|-----------------|
| $1 \frac{2}{3} + \frac{5}{6} = 2 \frac{1}{2}$ | $1 \ \frac{a}{b/c} \ 2 \ \frac{a}{b/c} \ 3$ | 2.112. |
| $2 \frac{1}{2} \leftrightarrow 2.5$ (Fraction \leftrightarrow Decimal) | $+ \ 5 \ \frac{a}{b/c} \ 6 \ =$ $\frac{a}{b/c}$ $\frac{a}{b/c}$ | 2.5 2.112. |

- Result will be displayed in decimal format automatically whenever the total digits of a fractional value (integer + numerator + denominator + separator marks) exceeds 10.
- As a fraction calculation is mixed with decimal value, the result will be displayed by decimal format.

Decimal \leftrightarrow Mixed fraction \leftrightarrow Improper fraction conversion

| Example | Operation | Display (Lower) |
|--|---|-----------------|
| $5.25 \leftrightarrow 5 \frac{1}{4}$ (Decimal \leftrightarrow Mixed Fraction) | $5 \ . \ 2 \ 5 \ =$ | 5.25 |
| (Mixed Fraction \leftrightarrow Improper Fraction) | $\frac{a}{b/c}$ Shift $\frac{d/c}{}$ | 5.114. 21.4. |

- Fraction conversion may take as long as two seconds.

! You can specify the fraction calculation result (when the result greater than one) display format by either mixed fraction or improper fraction. Simply press $\boxed{\text{MODE}} \leftarrow [\text{Disp}] \boxed{1} \rightarrow$, then press the corresponding setting you need:

- $\boxed{1}$ a b/c : Mixed fraction
 $\boxed{2}$ d/c : Improper fraction

Percentage Calculations

$\boxed{\text{MODE}} \rightarrow \boxed{\%}$

You can perform the following percentage calculations:

- Basic** : To calculate a certain percentage of a value
 (A $\boxed{\times}$ B $\boxed{\text{Shift}} \boxed{\%} \boxed{=}$).
 : Percentage of a value against another value
 (A $\boxed{\div}$ B $\boxed{\text{Shift}} \boxed{\%} \boxed{=}$).

| Example | Operation | Display (Upper) | Display (Lower) |
|------------------------------------|--|-----------------|-----------------|
| To calculate 25% of 820 | $\boxed{8} \boxed{2} \boxed{0} \boxed{\times} \boxed{2} \boxed{5} \boxed{\text{Shift}} \boxed{\%} \boxed{=}$ | 820 x 25 % | 205. |
| The percentage of 750 against 1250 | $\boxed{7} \boxed{5} \boxed{0} \boxed{\div} \boxed{1} \boxed{2} \boxed{5} \boxed{0} \boxed{\text{Shift}} \boxed{\%} \boxed{=}$ | 750 ÷ 1250 % | 60. |

Mark up and Discount

| Example | Operation | Display (Upper) | Display (Lower) |
|-----------------------|--|-----------------|-----------------|
| 820 mark up 25% | $\boxed{8} \boxed{2} \boxed{0} \boxed{\times} \boxed{2} \boxed{5} \boxed{\text{Shift}} \boxed{\%} \boxed{=}$ $\boxed{+} \boxed{\text{Ans}} \boxed{=}$ | 820 + Ans | 1,025. |
| 820 have 25% discount | $\boxed{8} \boxed{2} \boxed{0} \boxed{\times} \boxed{2} \boxed{5} \boxed{\text{Shift}} \boxed{\%} \boxed{=}$ $\boxed{-} \boxed{\text{Ans}} \boxed{=}$ | 820 - Ans | 615. |

Percentage Increase : If "A" is added to "B", the percentage increase from "B" is:

$$\boxed{(A + B)} \boxed{\div} B \boxed{\times} \boxed{1} \boxed{0} \boxed{0}$$

Percentage Change : If "A" is changed into "B", the percentage change from "A" to "B" is:

$$\boxed{(A - B)} \boxed{\div} A \boxed{\times} \boxed{1} \boxed{0} \boxed{0}$$

| Example | Operation | Display (Upper) | Display (Lower) |
|--|--|-----------------|-----------------|
| 300 is added to 750, the percentage increase of 750 is | (3 0 0 + 7 5 0) ÷ 7 5 0 × 1 0 0 = | (300+750)÷75 | 140. |
| 25 increased into 30, the percentage change of 25 is | (3 0 - 2 5) ÷ 2 5 × 1 0 0 = | (30-25)÷25x1 | 20. |

Percentage Proportion : the ratio/ percentage of each individual portion in a calculation expression.

If $A + B + C = D$

"A" is a% of "D" where $a = \frac{A}{D} \times 100\%$

Examples: To calculate the ratio of each portion as $25+85+90=200$ (100%), the ratio of 25 is 12.5%, 85 is 42.5%, 90 is 45%

| Operation | Display (Upper) | Display (Lower) |
|--------------------------------|-----------------|-----------------|
| 2 5 + 8 5 + 9 0 Shift STO A | 25+85+90 → A | 200. |
| 2 5 ÷ RCL* A Shift % = | 25÷A % | 12.5 |
| 8 5 ÷ RCL* A Shift % = | 85÷A % | 42.5 |
| 9 0 ÷ Alpha* A Shift % = | 90÷A % | 45. |

* You can store the sum of value into memory variables, then recall and use the value by pressing **RCL** or **Alpha** + Memory variable.

Degree-Minutes-Seconds Calculations



You can use degrees (hours), minutes and seconds key to perform a sexagesimal (base-60 notational system) calculation or convert the sexagesimal value into decimal value.

Degree-Minutes-Seconds ↔ Decimal points

| Examples | Operation | Display (Lower) |
|--|--|--------------------------|
| 86°37' 34.2" ÷ 0.7 = 123°45'6" 123°45'6" → 123.7516667 | 8 6 ° 3 7 ° 3 4 . 2 " ÷ 3 4 ° . 2 " ÷ 0 ° . 7 " = ° | 123°45'6. 123.7516667 |
| 2.3456 → 2°20'44" | 2 ° . 3 4 5 6 = Shift ° ° ° | 2°20'44.16 |

Constant Value Calculations

C-VALUE

F-570SG has total 79 constant values, you can enter (or exit) the constant value selection menu by pressing **C-VALUE**, the following display will be shown:

\leftarrow 00 mp mn me \rightarrow ^D
 INPUT 1 - 7 9

- You can go to the next or previous value selection pages by pressing \uparrow or \downarrow .
- To select a constant value simply press \leftarrow or \rightarrow button. The selection cursor will shift left or right to underline a constant symbol and at the same time the display lower line will show the value of the underlined constant symbol.
- The underlined constant symbol will be selected as you press **=**.
- You can instantly get the constant value if you input the constant value item number and press **=** when the selection cursor is underling 00.

| Operation | Display |
|---|--|
| C-VALUE (menu selection page) | \leftarrow <u>00</u> mp mn me \rightarrow ^D INPUT 1 - 7 9 |
| \downarrow \rightarrow | \leftarrow 04 <u>mμ</u> a0 h \rightarrow 1.883531475 $\times 10^{-28}$ |
| = (confirm selection) | m μ 0. |
| + C-VALUE 3 5 | \leftarrow <u>35</u> mp mn me \rightarrow INPUT 1 - 7 9 |
| = = | m μ + g 9.80665 |

Scientific Constant Table

| NO. | Constant | Symbol | Value | Unit |
|-----|---|-----------------|---------------------------------|-------------------------------------|
| 1. | Proton mass | m_p | $1.672621777 \times 10^{-27}$ | kg |
| 2. | Neutron mass | m_n | $1.674927351 \times 10^{-27}$ | kg |
| 3. | Electron mass | m_e | $9.10938291 \times 10^{-31}$ | kg |
| 4. | Muon mass | m_μ | $1.883531475 \times 10^{-28}$ | kg |
| 5. | Bohr radius $\alpha / 4\pi R_\infty$ | a_0 | $0.52917721092 \times 10^{-10}$ | m |
| 6. | Planck constant | h | $6.62606957 \times 10^{-34}$ | J s |
| 7. | Nuclear magneton $e \hbar / 2m_p$ | μ_N | $5.05078353 \times 10^{-27}$ | J T ⁻¹ |
| 8. | Bohr magneton $e \hbar / 2m_e$ | μ_B | $927.400968 \times 10^{-26}$ | J T ⁻¹ |
| 9. | $h / 2\pi$ | \hbar | $1.054571726 \times 10^{-34}$ | J s |
| 10. | Fine-structure constant $e^2 / 4\pi\epsilon_0 \hbar c$ | α | $7.2973525698 \times 10^{-3}$ | |
| 11. | Classical electron radius $\alpha^2 a_0$ | r_e | $2.8179403267 \times 10^{-15}$ | m |
| 12. | Compton wavelength $h / m_e c$ | λ_c | $2.4263102389 \times 10^{-12}$ | m |
| 13. | Proton gyromagnetic ratio $2\mu_p / \hbar$ | γ_p | 2.675222005×10^8 | s ⁻¹ T ⁻¹ |
| 14. | Proton Compton wavelength $h / m_p c$ | $\lambda_{c,p}$ | $1.32140985623 \times 10^{-15}$ | m |
| 15. | Neutron Compton wavelength $h / m_n c$ | $\lambda_{c,n}$ | $1.3195909068 \times 10^{-15}$ | m |
| 16. | Rydberg constant $\alpha^2 m_e c / 2h$ | R_∞ | 10973731.568539 | m ⁻¹ |
| 17. | (unified) atomic mass unit | u | $1.660538921 \times 10^{-27}$ | kg |
| 18. | Proton magnetic moment | μ_p | $1.410606743 \times 10^{-26}$ | J T ⁻¹ |
| 19. | Electron magnetic moment | μ_e | $-928.476430 \times 10^{-26}$ | J T ⁻¹ |
| 20. | Neutron magnetic moment | μ_n | $-0.96623647 \times 10^{-26}$ | J T ⁻¹ |
| 21. | Muon magnetic moment | μ_μ | $-4.49044807 \times 10^{-26}$ | J T ⁻¹ |
| 22. | Faraday constant $N_A e$ | F | 96485.3365 | C mol ⁻¹ |
| 23. | Elementary charge | e | $1.602176565 \times 10^{-19}$ | C |
| 24. | Avogadro constant | N_A | $6.02214129 \times 10^{23}$ | mol ⁻¹ |
| 25. | Boltzmann constant R / N_A | k | $1.3806488 \times 10^{-23}$ | J K ⁻¹ |
| 26. | Molar volume of ideal gas RT/p T=273.15 K, p=101.325 kPa | V_m | 22.413968×10^{-3} | m ³ mol ⁻¹ |
| 27. | Molar gas constant | R | 8.3144621 | J mol ⁻¹ K ⁻¹ |
| 28. | Speed of light in vacuum | c_0 | 299792458 | m s ⁻¹ |
| 29. | First radiation constant $2\pi \hbar c^2$ | c_1 | $3.74177153 \times 10^{-16}$ | W m ² |
| 30. | Second radiation constant hc/k | c_2 | 1.4387770×10^{-2} | m K |

| NO. | Constant | Symbol | Value | Unit |
|-----|---|-----------------|---------------------------------|---|
| 31. | Stefan-Boltzmann constant | σ | 5.670373×10^{-8} | $\text{W m}^{-2} \text{K}^{-4}$ |
| 32. | Electric constant $1/\mu_0 c^2$ | ϵ_0 | $8.854187817 \times 10^{-12}$ | F m^{-1} |
| 33. | Magnetic constant | μ_0 | $12.566370614 \times 10^{-7}$ | N A^{-2} |
| 34. | Magnetic flux quantum $h/2e$ | Φ_0 | $2.067833758 \times 10^{-15}$ | Wb |
| 35. | Standard acceleration of gravity | g | 9.80665 | m s^{-2} |
| 36. | Conductance quantum $2e^2/h$ | G_0 | $7.7480917346 \times 10^{-5}$ | S |
| 37. | Characteristic impedance of vacuum $\sqrt{\mu_0 / \epsilon_0} = \mu_0 c$ | Z_0 | 376.730313461 | Ω |
| 38. | Celsius temperature | t | 273.15 | |
| 39. | Newtonian constant of gravitation | G | 6.67384×10^{-11} | $\text{m}^3 \text{kg}^{-1} \text{s}^{-2}$ |
| 40. | Standard atmosphere | atm | 101325 | Pa |
| 41. | Proton g-factor $2\mu_p/\mu_N$ | g_p | 5.585694713 | |
| 42. | $\lambda_{c,n} / 2\pi$ | $\lambda_{c,n}$ | $0.21001941568 \times 10^{-15}$ | m |
| 43. | Planck length $\hbar/m_p c = (\hbar G / c^3)^{1/2}$ | l_p | 1.616199×10^{-35} | m |
| 44. | Planck time $l_p/c = (\hbar G / c^5)^{1/2}$ | t_p | 5.39106×10^{-44} | s |
| 45. | Planck mass $(\hbar c / G)^{1/2}$ | m_p | 2.17651×10^{-8} | kg |
| 46. | Atomic mass constant | m_u | $1.660538921 \times 10^{-27}$ | kg |
| 47. | Electron volt: $(e/C)\text{J}$ | eV | $1.602176565 \times 10^{-19}$ | J |
| 48. | Molar planck constant | $N_A h$ | $3.9903127176 \times 10^{-10}$ | J s mol^{-1} |
| 49. | Wien displacement law constant | b | 2.8977721×10^{-3} | m K |
| 50. | Lattice parameter of Si (in vacuum, 22.5°C) | a | $543.1020504 \times 10^{-12}$ | m |
| 51. | Hartree energy $e^2/4\pi\epsilon_0 a_0$ | E_h | $4.35974434 \times 10^{-18}$ | J |
| 52. | Loschmidt constant N_A/V_m | n_0 | 2.6867805×10^{25} | m^{-3} |
| 53. | Inverse of conductance quantum | G_0^{-1} | 12906.4037217 | Ω |
| 54. | Josephson constant $2e/h$ | K_J | 483597.870×10^9 | Hz V^{-1} |
| 55. | Von Klitzing constant h/e^2 | R_K | 25812.8074434 | Ω |
| 56. | $\lambda_c / 2\pi$ | λ_c | $386.15926800 \times 10^{-15}$ | m |
| 57. | Thomson cross section $(8\pi/3)r_e^2$ | σ_e | $0.6652458734 \times 10^{-28}$ | m^2 |
| 58. | Electron magnetic moment anomaly $ \mu_e /\mu_B - 1$ | a_e | $1.15965218076 \times 10^{-3}$ | |
| 59. | Electron g-factor $-2(1 + a_e)$ | g_e | -2.00231930436153 | |
| 60. | Electron gyromagnetic ratio $2 \mu_e /\hbar$ | γ_e | $1.760859708 \times 10^{11}$ | $\text{s}^{-1} \text{T}^{-1}$ |
| 61. | Muon magnetic moment anomaly | a_μ | $1.16592091 \times 10^{-3}$ | |
| 62. | Muon g-factor $-2(1 + a_\mu)$ | g_μ | -2.0023318418 | |

| NO. | Constant | Symbol | Value | Unit |
|-----|--|----------------------------|---------------------------------|---------------------------------|
| 63. | Muon Compton wavelength $h/m_{\mu}c$ | $\lambda_{c,\mu}$ | $11.73444103 \times 10^{-15}$ | m |
| 64. | $\lambda_{c,\mu}/2\pi$ | $\tilde{\lambda}_{c,\mu}$ | $1.867594294 \times 10^{-15}$ | m |
| 65. | Tau Compton wavelength $h/m_{\tau}c$ | $\lambda_{c,\tau}$ | 0.697787×10^{-15} | m |
| 66. | $\lambda_{c,\tau}/2\pi$ | $\tilde{\lambda}_{c,\tau}$ | 0.111056×10^{-15} | m |
| 67. | Tau mass | m_{τ} | 3.16747×10^{-27} | kg |
| 68. | $\lambda_{c,p}/2\pi$ | $\tilde{\lambda}_{c,p}$ | $0.21030891047 \times 10^{-15}$ | m |
| 69. | Shielded proton magnetic moment moment (H ₂ O, sphere, 25°C) | μ'_p | $1.410570499 \times 10^{-26}$ | J T ⁻¹ |
| 70. | Neutron g-factor $2\mu_n/\mu_N$ | g_n | -3.82608545 | |
| 71. | Neutron gyromagnetic ratio $2 \mu'_n /\hbar$ | γ_n | $1.83247179 \times 10^{-8}$ | s ⁻¹ T ⁻¹ |
| 72. | Deuteron mass | m_d | $3.34358348 \times 10^{-27}$ | kg |
| 73. | Deuteron magnetic moment | μ_d | $0.433073489 \times 10^{-26}$ | J T ⁻¹ |
| 74. | Helion mass | m_h | $5.00641234 \times 10^{-27}$ | kg |
| 75. | Shielded helion magnetic moment (gas, sphere, 25°C) | μ'_h | $-1.074553044 \times 10^{-26}$ | J T ⁻¹ |
| 76. | Shielded helion gyromagnetic ratio $2 \mu'_h /\hbar$ (gas, sphere, 25°C) | γ'_h | $2.037894659 \times 10^{-8}$ | s ⁻¹ T ⁻¹ |
| 77. | Molar planck constant | m_{α} | $6.64465675 \times 10^{-27}$ | kg |
| 78. | Shielded proton gyromagnetic ratio $2\mu'_p/\hbar$ (H ₂ O, sphere, 25°C) | γ'_p | $2.675153268 \times 10^{-8}$ | s ⁻¹ T ⁻¹ |
| 79. | Proton magnetic shielding correction $1-\mu'_p/\mu_p$ (H ₂ O, sphere, 25°C) | σ'_p | 25.694×10^{-6} | |

! Constant value cannot perform rounding.

Source: CODATA Internationally 2010
<http://physics.nist.gov/constants>

Metric Conversions

CONVT

F-570SG has 172 patterns of unit conversions to convert a value to specified metric units. There are 8 categories including distance, area, temperature, capacity, weight, energy, pressure and speed.

- Press CONVT to enter the conversion menu.
- Press \uparrow or \downarrow to select the category .
- Press \leftarrow or \rightarrow then \equiv to select the start unit.
- Press \leftarrow or \rightarrow then \equiv to select the end unit. You can preview the value before pressing \equiv .

| Page | Symbol | Unit |
|------|--------------------|----------------------------|
| 1 | feet | feet |
| | m | meter |
| | mil | milliliter |
| | mm | millimeter |
| | in | inch |
| | cm | centimeter |
| | yd | yard |
| | mile | mile |
| 2 | km | kilometer |
| | ft ² | square foot |
| | yd ² | square yard |
| | m ² | square meter |
| | mile ² | square mile |
| | km ² | square kilometer |
| | hectares | hectare |
| 3 | acres | acre |
| | °F | degree |
| 4 | °C | degree Celsius |
| | gal | gallon (U.K.) |
| | liter | liter |
| | B.gal | gallon (U.S.) |
| | pint | pint |
| 5 | fl.oz | fluid ounces (U.S.) |
| | Tr.oz | ounce (troy or apothecary) |
| | oz | ounces |
| | lb | libra |
| | Kg | kilogram |
| 6 | g | gram |
| | J | joule |
| 7 | cal.f | calorie |
| | atm | standard atmosphere |
| | Kpa | kilopascal |
| | mmHg | millimeter of mercury |
| 8 | cmH ₂ O | centimeter of water |
| | m/s | Meter per second |
| | km/h | Kilometer per hour |

- You can go back to the calculation mode instantly as the **CONVT** key is pressed within the category selection pages. But after selected the base conversion unit, **▲**, **▼** or **CONVT** keys will be invalid.

Example: Convert $10 + (5 \text{ ft}^2 \rightarrow \text{m}^2) = 10.4645152$

| Operation | Display |
|---|--|
| 1 0 + 5 CONVT (enter the conversion menu) | ← <u>feet</u> m mil ▲ 0. ▼ |
| ▼ = (select ft ²) | ← <u>ft²</u> yd ² m ² 5. |
| ▶ ▶ = (convert to m ²) | 10+5ft ² → m ² ▲ 0. |
| = (calculate the answer) | 10+5ft ² → m ² ▲ 10.4645152 |

! If the converted result is overflow, [-E-] will be shown in the lower display. User cannot press **=** to select the over flow value but following scenario are valid:

- Scenario A - Keep selecting the other conversion value by pressing **▶** or **◀**.
- Scenario B - Clear the screen by **ON/CA** and jump out the selection.
- Scenario C - Pressing **CONVT** to jump back to previous calculation screen.

Engineering Notation Calculations

ENG **◀ENG**

Following nine symbols can be used when engineering symbols are turned on by pressing **MODE** **◀** **1** **1** and the LCD will display [Eng].

| Operation | Unit | Unit |
|-------------------------|-------|-------------------|
| Shift ◻ k | Kilo | 10 ³ |
| Shift ◻ M | Mega | 10 ⁶ |
| Shift ◻ G | Giga | 10 ⁹ |
| Shift ◻ T | Tera | 10 ¹² |
| Shift ◻ m | Milli | 10 ⁻³ |
| Shift ◻ μ | Micro | 10 ⁻⁶ |
| Shift ◻ n | Nano | 10 ⁻⁹ |
| Shift ◻ p | Pico | 10 ⁻¹² |
| Shift ◻ f | Femto | 10 ⁻¹⁵ |

Example: Convert 0.0007962 second into nano-second =
 796200×10^{-9}

| Operation | Display (Upper) | Display (Lower) |
|------------------------|----------------------------------|-----------------|
| 0 . 0 0 0 7 9 6 2 = | 0.0007962 μ \blacktriangle | 796.2 |
| ENG | 0.0007962 n \blacktriangle | 796,200. |

Example: 0.128 gram + 9.3 kilogram = 9300.128 gram

| | | |
|--|---------------------------------|----------|
| 0 . 1 2 8 + 9 . 3 <small>Shift</small> k = | 0.128 + 9.3k k \blacktriangle | 9.300128 |
|--|---------------------------------|----------|

Fix, Sci, Norm, ROUND

You can change the number of decimal point, the number of significant digits, or the exponential notation criteria by pressing MODE to the following selection screen:

| | | |
|------------------|-----|--------------------|
| \leftarrow Fix | Sci | Norm \rightarrow |
| 1 | 2 | 3 |

Press 1 (Fixed Decimal Setting) : [Fix 0 ~ 9?] appears on the display. Then, you can specify the number of decimal places by pressing 0 ~ 9.

Press 2 (Scientific Notation) : [Sci 0 ~ 9?] appears on the display. Then, you can specify the number of significant digits by pressing 0 ~ 9.

Press 3 (Exponential Notation) : [Norm 1 ~ 2?] appears. Then, you can specify the exponential notation format by pressing 1 or 2.

Norm 1 : Exponential notation is automatically used for integer values with more than 10 digits and decimal values with more than two decimal point.

Norm 2 : Exponential notation is automatically used for integer values with more than 10 digits and decimal values with more than nine decimal point.

• To clear the setting, refer page 13.

ROUND (internal rounding) : Calculate the value or formula result to decimal, round it off to the significant decimal place according to the current specified indication digit setting (Fix, Sci, Norm).

| Examples: $57 \div 7 \times 20 = ??$ | Operation | Display (Lower) |
|---|--|---|
| At default setting. To fix 4 digits decimal point. (Internal calculation continues 16 digits) | $5 \ 7 \ \div \ 7 \ \times$ $2 \ 0 \ =$ MODE $\leftarrow \leftarrow 1 \ 4$ $5 \ 7 \ \div \ 7 \ =$ $\times \ 2 \ 0 \ =$ | 162.8571429 162.8571 8.1429 162.8571 |
| Perform internal rounding under the specified decimal setting. | $5 \ 7 \ \div \ 7 \ =$ Shift ROUND $\times \ 2 \ 0$ $=$ | 8.1429 162.8580 |
| To display by 6 digits scientific notation. | MODE $\leftarrow \leftarrow 2 \ 6$ | 1.62858×10^{02} |
| Notation format by pressing to $\boxed{1}$ clear the FIX and Sci specifications. | MODE $\leftarrow \leftarrow 3 \ 1$ | 162.858 |

FUNCTIONAL SCIENTIFIC CALCULATIONS

- Press $\boxed{\text{MODE}} \boxed{1}$ to enter COMP mode for performing functional scientific calculations.
- During the busy calculation, the calculator will display the message [PROCESSING].
- $\pi = 3.14159265359$

Square, Root, Cube, Cube Root, Power, Power Root, Reciprocal and Pi

| | | | |
|------------------------|--------------------------------------|-----------------------------|-------------------------------------|
| $\boxed{x^2}$ Square | $\boxed{\sqrt{\quad}}$ Root | $\boxed{x^y}$ Cube | $\boxed{\sqrt[3]{\quad}}$ Cube Root |
| $\boxed{\wedge}$ Power | $\boxed{\sqrt[y]{\quad}}$ Power Root | $\boxed{x^{-1}}$ Reciprocal | $\boxed{\pi}$ Pi |

Example: $(\sqrt{-2^2 + 5^3}) \times \pi = 35.68163348$


| Operation | Display (Upper) | Display (Lower) |
|---|---------------------------|-----------------|
| $(\ \sqrt{\quad} \ (\ (\ (-) \ 2 \) \)$ $\boxed{x^2} \ + \ 5 \ \text{Shift} \ \boxed{x^y} \) \)$ Shift $\pi \ =$ | $(\sqrt{((-2)^2 + 5^3)})$ | 35.68163348 |

Example: $(\sqrt[3]{2^6} + \sqrt[5]{243})^{-1} = 0.142857142$

| Operation | Display (Upper) | Display (Lower) |
|---|---|-----------------|
| $(\ \text{Shift} \ \sqrt[3]{\quad} \ 2 \ \wedge \ 6 \ +$ $5 \ \text{Shift} \ \sqrt[5]{\quad} \ 2 \ 4 \ 3 \)$ $\boxed{x^{-1}} \ =$ | $(\sqrt[3]{2^6} + 5 \times \sqrt[5]{243})^{-1}$ | 0.142857142 |


Angle Unit Conversion

The calculator default angle unit setting is "Degree". If you need to change into "Radian" or "Gradient", you can press $\boxed{\text{MODE}}$ a number of times until you reach the setup screen:



Then press the corresponding number key $\boxed{1}$, $\boxed{2}$ or $\boxed{3}$ for the angle unit you need. Then the display will show the **D**, **R** or **G** indicator accordingly.

To convert an angle unit between "Degree", "Radian" and "Gradient", you can press $\boxed{\text{Shift}} \boxed{\text{DRG}}$ and the following display menu will be shown:



Then, press $\boxed{1}$, $\boxed{2}$ or $\boxed{3}$ will convert the displayed value into the selected angle unit. If you want to indicate the value with other degree unit after conversion, change the unit using $\boxed{\text{MODE}} \leftarrow \leftarrow \leftarrow$.

Example: Convert 180 degree into radian and gradient
 $(180^\circ = \pi^{\text{Rad}} = 200^{\text{Grad}})$

| Operation | Display (Upper) | Display (Lower) |
|--|----------------------|-----------------|
| $\boxed{\text{MODE}} \rightarrow \rightarrow \rightarrow \boxed{2}$ (Radian mode) $\boxed{1} \boxed{8} \boxed{0} \boxed{\text{Shift}} \boxed{\text{DRG}} \boxed{1} \boxed{=}$ | 180° R | 3.141592654 |
| $\boxed{\text{MODE}} \leftarrow \leftarrow \leftarrow \boxed{3}$ (Gradient mode) $\boxed{=}$ | 180° G | 200. |

Trigonometry Calculations

$\boxed{\sin}$ $\boxed{\cos}$ $\boxed{\tan}$ $\boxed{\sin^{-1}}$ $\boxed{\cos^{-1}}$ $\boxed{\tan^{-1}}$ $\boxed{\text{hyp}}$

- Before using the trigonometric functions (except hyperbolic calculations), select the appropriate angle unit (Deg/ Rad/ Grad) by $\boxed{\text{MODE}}$.
- $90^\circ = \frac{\pi}{2}$; Radian = 100 Gradient.

Trigonometric (sin/ cos/ tan), Inverse Trigonometric (sin⁻¹/ cos⁻¹/ tan⁻¹) Functions

| Examples | Operation | Display (Lower) |
|--|---|-----------------|
| Degree Mode | MODE \leftarrow \leftarrow \leftarrow 1 | 0. |
| $\sin 53^\circ 22' 12'' = 0.802505182$ | sin 5 3 ° ' " 2 2 ° ' " 1 2 ° ' " = | 0.802505182 |
| $\operatorname{cosec} x = 1/\sin x$ $\operatorname{cosec} 45^\circ = 1.414213562$ | (sin 4 5) x ⁻¹ = | 1.414213562 |
| $\tan^{-1}(5/6) = 39.80557109^\circ$ | Shift tan ⁻¹ (5 ÷ 6 = | 39.80557109 |
| Radian Mode | MODE \leftarrow \leftarrow \leftarrow 2 ON/CA | 0. |
| $\cos(\pi/6)^{\text{Rad}} = 0.866025403$ | cos 6 x ⁻¹ Shift π = | 0.866025403 |
| $\cos^{-1} \frac{1}{\sqrt{2}} = 0.785398163$ 0.25π (Rad) | Shift cos ⁻¹ (1 ÷ $\sqrt{\quad}$ 2 = = | 0.785398163 |
| | Ans ÷ Shift π = | 0.25 |

Hyperbolic (sinh/ cosh/ tanh), Inverse Hyperbolic (sinh⁻¹/ cosh⁻¹/ tanh⁻¹) Functions

| Examples | Operation | Display (Lower) |
|---|------------------------------------|-----------------|
| $\sinh 2.5 - \cosh 2.5 =$ -0.082084998 | hyp sin 2 • 5 - hyp cos 2 • 5 = | -0.082084998 |
| $\cosh^{-1} 45 = 4.499686191$ | hyp Shift cos ⁻¹ 4 5 = | 4.499686191 |

Logarithm, Natural Logarithm, Antilogarithm and Logab

log ln 10^x e^x log_ab

| Examples | Operation | Display (Lower) |
|-----------------------------------|---|-----------------|
| $\log 255 + \ln 3 = 3.505152469$ | log 2 5 5 + ln 3 = | 3.505152469 |
| $e^{-3} + 10^{1.2} = 15.89871899$ | Shift e ^x (-) 3 + Shift 10 ^x 1 • 2 = | 15.89871899 |
| $\log_3 81 - \log 1 = 4$ | log _a b 3 , 8 1) - log 1 = | 4. |

Coordinate Conversion

Pol() Rec()

- With polar coordinates, you can calculate and display result θ within $-180^\circ < \theta \leq 180^\circ$ range. (Same as Radian and Gradient)
- After conversion, results will automatically assigned to memory variables E and F.

Shift **Pol()** : To convert rectangular coordinates (x, y) to polar coordinates (r , θ); Press **RCL** **E** to display the value of r, or **RCL** **F** to display the value of θ .

| Examples | Operation | Display (Lower) |
|--|--|-----------------|
| Degree Mode | MODE ◀ ◀ ◀ 1 | 0. |
| With rectangular coordinate (x =1, y = $\sqrt{3}$). Find Polar coordinate (r, θ) at degree mode | Shift Pol() 1 , √ 3 = RCL F RCL E | 2. 60. 2. |

Shift **Rec()** : To converts polar coordinates (r , θ) to rectangular coordinates (x, y); Press **RCL** **E** to display the value of x, or **RCL** **F** to display the value of y.


| Examples | Operation | Display (Lower) |
|---|---|-------------------------|
| With Polar coordinate (r=2, $\theta=60^\circ$). Find rectangular coordinate (x,y) at degree mode | Shift Rec() 2 , 6 0 = RCL F RCL E | 1. 1.732050808 1. |

! [Syntax ERROR] will be shown if **,** is missed in the coordinate conversion calculation.

Complex Number Calculations

r **∠** **θ** **→** **a+bi** **↔** **r∠θ**
z **↔** **L**Abs**J** **L**Arg**J** **r** **∠** **θ** **↔** **r** **a+bi** **r** **∠** **θ** **↔** **L**Conj**J**

Complex numbers can be expressed by rectangular form ($z = a + bi$) or polar form ($r \angle \theta$). Where " a " is the real number part, " bi " is the imaginary number part (and i is the imaginary unit equal to square root of -1 , $\sqrt{-1}$), " r " is the absolute value, and " θ " is the argument of the complex number.



As you need to perform the complex number calculation

- Press MODE $\boxed{2}$ to enter CPLX mode.
- Check the current angle unit setting (Deg, Rad, Grad).
- The $R \leftrightarrow I$ indicator will be shown as the calculation result having complex numbers. Just press Shift $\boxed{\text{r} \leftrightarrow \text{Im}1}$ to switch the result display.
- $[i]$ icon indicate the display result is imaginary number part; $[\angle]$ indicate the display value is the argument value θ .
- But the imaginary numbers will use up replay memory capacity.

Displaying the complex number calculation result

Pressing MODE $\boxed{\leftarrow}$ $\boxed{1}$ $\boxed{\rightarrow}$, following display options will be shown:

| | |
|-------------------|-------------------------------|
| $\leftarrow a+bi$ | $r \angle \theta \rightarrow$ |
| 1 | 2 |

You can set up the complex number calculation result display format by pressing:

- $\boxed{1}$: Rectangular form (Default setting).
- $\boxed{2}$: Polar form (the $[r \angle \theta]$ display indicator will be turned on).

Example: $(12+3i) - (3 + 1i) = 9 + 2i = 9.219544457 (r) \angle 12.52880771 (\theta)$

| Operation (Angle Unit: Degree) | Display (Upper) | Display (Lower) |
|--|--|-------------------------------------|
| $\boxed{(}$ $\boxed{1}$ $\boxed{2}$ $\boxed{+}$ $\boxed{3}$ \boxed{i} $\boxed{)}$ $\boxed{-}$ $\boxed{(}$ $\boxed{3}$ $\boxed{+}$ \boxed{i} $\boxed{=}$ Shift $\boxed{\text{r} \leftrightarrow \text{Im}1}$ | $(12+3i)-(3+i)$ $R \leftrightarrow I \uparrow$ $(12+3i)-(3+i)$ $R \leftrightarrow I \uparrow$ | 9. 2. <i>i</i> |
| MODE $\boxed{\leftarrow}$ $\boxed{1}$ $\boxed{\rightarrow}$ $\boxed{2}$ (change display value) Shift $\boxed{\text{r} \leftrightarrow \text{Im}1}$ | $(12+3i)-(3+i)$ $r \angle \theta$ $R \leftrightarrow I \uparrow$ $(12+3i)-(3+i)$ $r \angle \theta$ $R \leftrightarrow I \uparrow$ | $\angle 12.52880771$ 9.219544457 |

Rectangular Form \leftrightarrow Polar Form Conversion

Press Shift $\boxed{\text{r} \leftrightarrow \text{r} \angle \theta 1}$ can convert rectangular form complex number into polar form; whereas press Shift $\boxed{\text{r} \leftrightarrow \text{a}+bi 1}$ will convert polar form complex number into rectangular form.

Example: $3 + 4i = 5 \angle 53.13010235$

| Operation (Angle Unit: Degree) | Display (Upper) | Display (Lower) |
|--|---|----------------------|
| $\boxed{3}$ $\boxed{+}$ $\boxed{4}$ \boxed{i} Shift $\boxed{\text{r} \leftrightarrow \text{r} \angle \theta 1}$ $\boxed{=}$ Shift $\boxed{\text{r} \leftrightarrow \text{Im}1}$ | $3 + 4i > r \angle \theta$ $R \leftrightarrow I \uparrow$ | 5 |
| Shift $\boxed{\text{r} \leftrightarrow \text{Im}1}$ | $3 + 4i > r \angle \theta$ $R \leftrightarrow I \uparrow$ | $\angle 53.13010235$ |

Example: $\sqrt{2}\angle 45 = 1 + i$

| Operation (Angle Unit: Degree) | Display (Upper) | Display (Lower) |
|--|--|-----------------|
| $\sqrt{\quad}$ \square 2 \square Shift \square \square 4 \square 5 \square Shift \square \square \square | $\sqrt{2}\angle 45 > a+bi$ $\overset{R \rightarrow I}{\blacktriangle}$ | 1. |
| Shift \square \square | $\sqrt{2}\angle 45 > a+bi$ $\overset{R \rightarrow I}{\blacktriangle}$ | 1.i |

Absolute Value and Argument Calculation

With the rectangular form complex number, you can calculate the corresponding absolute value (r) or argument (θ) by \square \square \square or \square \square \square key respectively.

Example: What's the absolute value (r) and argument (θ) if complex number is $6+8i$

| Operation (Angle Unit: Degree) | Display (Upper) | Display (Lower) |
|---|-----------------------------|-----------------|
| Shift \square \square (\square 6 \square + \square 8 \square \square \square \square | Abs (6+8i \blacktriangle | 10. |
| \square Shift \square \square \square | Arg (6+8i \blacktriangle | 53.13010235 |

Conjugate of a complex number

If the complex number is $z = a + bi$, the conjugate value of this complex number should be $z = a - bi$.

Example: The conjugate of $3 + 4i$ is $3 - 4i$

| Operation (Angle Unit: Degree) | Display (Upper) | Display (Lower) |
|---|--|-----------------|
| Shift \square \square (\square 3 \square + \square 4 \square \square \square \square | Conjg (3+4i $\overset{R \rightarrow I}{\blacktriangle}$ | 3. |
| Shift \square \square | Conjg (3+4i $\overset{R \rightarrow I}{\blacktriangle}$ | - 4.i |

Base-n Calculations and Logical Calculations

- Press \square \square \square 3 to enter Base-n mode for decimal (base 10), hexadecimal (base 16), binary (base 2), octal (base 8), or logical calculations.
- Default base number system is Decimal with [d] display indicator
- To select a specific number system in base mode, simply press \square DEC Decimal [d], \square HEX Hexadecimal [H], \square BIN Binary [b], or \square OCT Octal [o].
- The \square \square \square key allows you to perform logical calculations includes: Logic connection [And] / [Or], exclusive or [Xor], exclusive nor [Xnor], argument complement [Not], and negation [Neg].
- If the binary or octal calculation result is more than 8-digit, [1b] / [1o] will be displayed to indicate the result has next block. Keep pressing \square \square \square can loop between result blocks.
- All the scientific functions cannot be used, and you cannot input the value with decimal place or exponent.

Binary Calculation

Example: $10101011 + 1100 - 1001 \times 101 \div 10 = 10100001$
(at Binary Mode)

| Operation | Display (Upper) | Display (Lower) |
|--|-----------------|------------------------|
| <input type="text" value="1"/> <input type="text" value="0"/> <input type="text" value="1"/> <input type="text" value="0"/> <input type="text" value="1"/> <input type="text" value="0"/> <input type="text" value="1"/> <input type="text" value="1"/> <input type="text" value="+"/> <input type="text" value="1"/> <input type="text" value="1"/> <input type="text" value="0"/> <input type="text" value="0"/> <input type="text" value="-"/> <input type="text" value="1"/> <input type="text" value="0"/> <input type="text" value="0"/> <input type="text" value="1"/> <input type="text" value="x"/> <input type="text" value="1"/> <input type="text" value="0"/> <input type="text" value="1"/> <input type="text" value="÷"/> <input type="text" value="1"/> <input type="text" value="0"/> <input type="text" value="="/> | 10101011+110 | 10100001. ^b |

Octal Calculation

Example: $645 + 321 - 23 \times 7 \div 2 = 1064$ (at Octal Mode)

| | | |
|---|--------------|--------------------|
| <input type="text" value="6"/> <input type="text" value="4"/> <input type="text" value="5"/> <input type="text" value="+"/> <input type="text" value="3"/> <input type="text" value="2"/> <input type="text" value="1"/> <input type="text" value="-"/> <input type="text" value="2"/> <input type="text" value="3"/> <input type="text" value="x"/> <input type="text" value="7"/> <input type="text" value="÷"/> <input type="text" value="2"/> <input type="text" value="="/> | 645+321-23x7 | 1064. ^o |
|---|--------------|--------------------|

Hexadecimal Calculation

Example: $(77A6C + D9) \times B \div F = 57C87$ (at Hexadecimal Mode)

| | | |
|---|-------------------------|---------------------|
| <input type="text" value("(""=""/> <input type="text" value="7"/> <input type="text" value="7"/> <input type="text" value="A"/> <input type="text" value="6"/> <input type="text" value="C"/> <input type="text" value="+"/> <input type="text" value="D"/> <input type="text" value="9"/> <input type="text" value=")"/> <input type="text" value="x"/> <input type="text" value="B"/> <input type="text" value="÷"/> <input type="text" value="F"/> <input type="text" value="="/> | $(77A6C + D9) \times B$ | 57C87. ^H |
|---|-------------------------|---------------------|

Base-n transformation → → →

| | | |
|---|------------|-------------------------|
| <input type="text" value="OCT"/> <input type="text" value="1"/> <input type="text" value="2"/> <input type="text" value="3"/> <input type="text" value="4"/> <input type="text" value="5"/> <input type="text" value="+"/> <input type="text" value="logic"/> <input type="text" value="logic"/> <input type="text" value="logic"/> <input type="text" value="3"/> <input type="text" value="1"/> <input type="text" value="0"/> <input type="text" value="1"/> <input type="text" value="="/> | 12345+b101 | 12352. ^o |
| <input type="text" value="HEX"/> | 12345+b101 | 14EA. ^H |
| <input type="text" value="BIN"/> | 12345+b101 | 11101010. ^{1b} |
| <input type="text" value="←BIK"/> (go to next block of the result) | 12345+b101 | 10100. ^{2b} |
| <input type="text" value="←BIK"/> | 12345+b101 | 11101010. ^{1b} |

Logical Operation

| Examples (Hexadecimal Mode) | Operation | Display (Lower) |
|-----------------------------|---|------------------------|
| 789ABC Xnor 147258 | <input type="text" value="HEX"/> <input type="text" value="7"/> <input type="text" value="8"/> <input type="text" value="9"/> <input type="text" value="A"/> <input type="text" value="B"/> <input type="text" value="C"/> <input type="text" value="logic"/> <input type="text" value="3"/> <input type="text" value="1"/> <input type="text" value="4"/> <input type="text" value="7"/> <input type="text" value="2"/> <input type="text" value="5"/> <input type="text" value="8"/> <input type="text" value="="/> | FF93171b. ^H |
| Ans Or 789ABC | <input type="text" value="Ans"/> <input type="text" value="logic"/> <input type="text" value="2"/> <input type="text" value="7"/> <input type="text" value="8"/> <input type="text" value="9"/> <input type="text" value="A"/> <input type="text" value="B"/> <input type="text" value="C"/> <input type="text" value="="/> | FFFb9FbF. ^H |
| Neg 789ABC | <input type="text" value="logic"/> <input type="text" value="logic"/> <input type="text" value="3"/> <input type="text" value="7"/> <input type="text" value="8"/> <input type="text" value="9"/> <input type="text" value="A"/> <input type="text" value="B"/> <input type="text" value="C"/> <input type="text" value="="/> | FF876544. ^H |

! Beware of the allowable input range of each number system (page 10).

STATISTICAL CALCULATIONS [SD] [REG]

- To enter the standard deviation mode by pressing $\text{MODE MODE } \boxed{1}$, [SD] indicator lights up. If press $\text{MODE MODE } \boxed{2}$, you can enter the regression mode selection menu. [REG] indicator will be turned on.
- Before starting, be sure to clear the statistic memory by pressing $\text{Shift CLR } \boxed{1} = \text{ON/CA}$.
- Perform the data input (Precautions!).
 - In SD mode, store the displayed data by pressing $\boxed{\text{Data}}$.
 - In REG mode, store the x-data and y-data in the form of:
x-data $\boxed{,}$ y-data $\boxed{\text{Data}}$.
 - Pressing $\boxed{\text{Data}}$ $\boxed{\text{Data}}$ will input the same data twice.
 - Use $\text{Shift } \boxed{;}$ for same data multiple entries. For example in SD mode, the data 20 has 8 times will press 20 $\text{Shift } \boxed{;}$ 8 $\boxed{\text{Data}}$.
 - Each time you press $\boxed{\text{Data}}$ to register the input, the number of data input up to that point is indicated on the display once (n = the number of input data).
 - Press $\boxed{\wedge}$ or $\boxed{\vee}$ key during or after data input can display the data value (x) and data frequency (Freq). Follow with the above example, press $\boxed{\vee}$ will display [x1 = 20], and press $\boxed{\vee}$ will display [Freq1 = 8].
 - To edit the stored data, input the new value during the display of that data value (x) after pressing $\boxed{\wedge}$ or $\boxed{\vee}$ key, and then press $\boxed{=}$ to confirm the edit. But, if you press $\boxed{\text{Data}}$ instead of $\boxed{=}$, a new data value will be stored.
 - Press $\text{Shift } \boxed{\text{CD}}$ can delete the data during the display of that data value (x) after $\boxed{\wedge}$ or $\boxed{\vee}$ key is pressed; and the sequence of the data which following the deleted data will be shifted up automatically.
 - Press ON/CA key to exit the data value and frequency display, then you can perform other calculation operations.
 - Input data are stored in calculation memory. As the memory full, [Data Full] will be displayed and you cannot input or perform any calculation. Press ON/CA key to perform other calculation operations.
 - After changing into another mode or regression type (Lin, Log, Exp, Pwr, Inv, Quad), input data will be cleared.
- After finishing data entries, you can recall or calculate the statistical values.

Standard Deviation

- Press MODE MODE $\boxed{1}$ to enter SD mode.
- Before starting, be sure to clear the statistical memory by pressing Shift CLR $\boxed{1}$ ON/CA .
- You can recall the following statistical value after input all the data.

| Value | Symbol | Operation |
|------------------------------------|-----------------|---|
| Square of Sum | Σx^2 | Shift r-SUM $\boxed{1}$ |
| Summation of x | Σx | Shift r-SUM $\boxed{2}$ |
| Number of data sample | n | Shift r-SUM $\boxed{3}$ |
| Mean of x | \bar{x} | Shift r-VAR $\boxed{1}$ |
| Population Standard Deviation of x | $x\sigma_n$ | Shift r-VAR $\boxed{2}$ |
| Sample Standard Deviation of x | $x\sigma_{n-1}$ | Shift r-VAR $\boxed{3}$ |

Example: To calculate Σx^2 , Σx , n , \bar{x} , $x\sigma_n$, and $x\sigma_{n-1}$ of data: 75, 85, 90, 77, 77 in SD mode.

| Operation | Display (Upper) | Display (Lower) |
|---|-----------------|-----------------|
| Shift CLR $\boxed{1}$ ON/CA (select Sci, clear Stat. memory) | Stat clear | 0. |
| $\boxed{7}$ $\boxed{5}$ Data $\boxed{8}$ $\boxed{5}$ Data $\boxed{9}$ $\boxed{0}$ Data | $n =$ | 5. |
| $\boxed{7}$ $\boxed{7}$ Shift ; $\boxed{2}$ Data | | |
| Shift r-SUM $\boxed{1}$ = | Σx^2 | 32,808. |
| Shift r-SUM $\boxed{2}$ = | Σx | 404. |
| Shift r-SUM $\boxed{3}$ = | \bar{n} | 5. |
| Shift r-VAR $\boxed{1}$ = | $x\sigma$ | 80.8 |
| Shift r-VAR $\boxed{2}$ = | $x\sigma_n$ | 5.741080038 |
| Shift r-VAR $\boxed{3}$ = | $x\sigma_{n-1}$ | 6.418722614 |

Regression Calculations

- Press MODE MODE $\boxed{2}$ to enter REG mode, then the follow screen options will be shown:

| | | |
|------------------|-----|-------------------|
| \leftarrow Lin | Log | Exp \rightarrow |
| 1 | 2 | 3 |


Press $\boxed{1}$, $\boxed{2}$ or $\boxed{3}$ for the corresponding regression

[Lin] = Linear regression

[Log] = Logarithmic regression

[Exp] = Exponential regression

If follow with $\boxed{\text{MODE}}$ or \odot another regression options will be displayed as follow:



You can press $\boxed{1}$, $\boxed{2}$ or $\boxed{3}$ for the corresponding regression

[Pwr] = Power regression

[Inv] = Inverse regression

[Quad] = Quadratic regression

- Before starting, be sure to clear the statistical memory by pressing $\boxed{\text{Shift}} \boxed{\text{CLR}} \boxed{1} \boxed{=}$ $\boxed{\text{ON/CA}}$
- Input data in the form of x-data $\boxed{,}$ y-data $\boxed{\text{Data}}$. Use $\boxed{\text{Shift}} \boxed{!}$ for same data multiple entries.
- Press $\boxed{\text{Shift}} \boxed{\text{LCD}}$ can delete the data during the display of data value after \odot or \odot key is pressed.
- You can recall and use the following regression results:

| Value | Symbol | Operation |
|------------------------------------|------------------|--|
| Summation of all x^2 value | Σx^2 | $\boxed{\text{Shift}} \boxed{\text{r-SUMh}} \boxed{1}$ |
| Summation of all x value | Σx | $\boxed{\text{Shift}} \boxed{\text{r-SUMh}} \boxed{2}$ |
| Number of data sample | n | $\boxed{\text{Shift}} \boxed{\text{r-SUMh}} \boxed{3}$ |
| Summation of all y^2 values | Σy^2 | $\boxed{\text{Shift}} \boxed{\text{r-SUMh}} \odot \boxed{1}$ |
| Summation of all y values | Σy | $\boxed{\text{Shift}} \boxed{\text{r-SUMh}} \odot \boxed{2}$ |
| Summation of all xy pairs | Σxy | $\boxed{\text{Shift}} \boxed{\text{r-SUMh}} \odot \boxed{3}$ |
| Mean of the x values | \bar{x} | $\boxed{\text{Shift}} \boxed{\text{r-VAR1}} \boxed{1}$ |
| Population Standard Deviation of x | $x \sigma_n$ | $\boxed{\text{Shift}} \boxed{\text{r-VAR1}} \boxed{2}$ |
| Sample Standard Deviation of x | $x \sigma_{n-1}$ | $\boxed{\text{Shift}} \boxed{\text{r-VAR1}} \boxed{3}$ |
| Mean of the y values | \bar{y} | $\boxed{\text{Shift}} \boxed{\text{r-VAR1}} \odot \boxed{1}$ |
| Population Standard Deviation of y | $y \sigma_n$ | $\boxed{\text{Shift}} \boxed{\text{r-VAR1}} \odot \boxed{2}$ |
| Sample Standard Deviation of y | $y \sigma_{n-1}$ | $\boxed{\text{Shift}} \boxed{\text{r-VAR1}} \odot \boxed{3}$ |
| Regression coefficient | A | $\boxed{\text{Shift}} \boxed{\text{r-VAR1}} \odot \odot \boxed{1}$ |
| Regression coefficient | B | $\boxed{\text{Shift}} \boxed{\text{r-VAR1}} \odot \odot \boxed{2}$ |

| For non-quadratic regression | | |
|----------------------------------|---------------|---------------------|
| Correlation coefficient | r | Shift r5-VAR1 >> 3 |
| Regression estimated value | \hat{x} | Shift r5-VAR1 >>> 1 |
| Regression estimated value | \hat{y} | Shift r5-VAR1 >>> 2 |
| For Quadratic regression only | | |
| Summation of all x^3 values | Σx^3 | Shift r5-QUAD >> 1 |
| Summation of all x^2y pairs | Σx^2y | Shift r5-QUAD >> 2 |
| Summation of all x^4 values | Σx^4 | Shift r5-QUAD >> 3 |
| Regression coefficient | C | Shift r5-VAR1 >> 3 |
| Regression estimated value x_1 | \hat{x}_1 | Shift r5-VAR1 >>> 1 |
| Regression estimated value x_2 | \hat{x}_2 | Shift r5-VAR1 >>> 2 |
| Regression estimated value y | \hat{y} | Shift r5-VAR1 >>> 3 |

Linear regression

- The Linear regression formula is in relation to two variables:
 $y = A + Bx$
- Example:** By the following investment and yield table, calculate the linear regression (regression coefficient A, regression coefficient B) of capital investment verse yield, the correlation coefficient, the yield percentage at 45 thousand unit of investment, and the investment unit at 180% yield.

| Investment (thousand unit) | Yield (%) |
|----------------------------|-----------|
| 20 | 120 |
| 30 | 126 |
| 40 | 130 |
| 50 | 136 |
| 60 | 141 |

| Operation | Display (Upper) | Display (Lower) |
|---|-----------------|-----------------|
| MODE MODE 2 1 (Lin Regression) | | 0. |
| Shift CLR 1 = ON/CA (Clear Stat. memory) | | 0. |
| 2 0 , 1 2 0 Data 3 0 , 1 2 6 Data 4 0 , 1 3 0 Data 5 0 , 1 3 6 Data 6 0 , 1 4 1 Data | n = | 5. |
| Shift r ^{S-VAR1} > > 1 = (Coefficient A) | A | 109.8 |
| Shift r ^{S-VAR1} > > 2 = (Coefficient B) | B | 0.52 |
| Shift r ^{S-VAR1} > > 3 = (Correlation Coefficient) | r | 0.998523984 |
| 4 5 Shift r ^{S-VAR1} > > > 2 = (Yield %) | 45 \hat{y} | 133.2 |
| 1 8 0 Shift r ^{S-VAR1} > > > 1 = (Investment unit) | 180 \hat{x} | 135 |

Logarithmic, Exponential, Power, and Inverse Regression Formulas

- Loarithmic Regression : $y = A + B \ln x$
- Exponential Regression : $y = Ae^{Bx}$ ($\ln y = \ln A + Bx$)
- Power Regression : $y = Ax^B$ ($\ln y = \ln A + B \ln x$)
- Invere Regression : $y = A+Bx^{-1}$

Quadratic Regression

- The quadratic regression is in relation to the formula:
 $y = A + Bx + Cx^2$
- **Example:** ABC company investigated the effectiveness of the advertisement expenses in coded units, the following data were obtained:


| Advertisement expenses: x | Effectiveness: y (%) |
|---------------------------|----------------------|
| 18 | 38 |
| 35 | 54 |
| 40 | 59 |
| 21 | 40 |
| 19 | 38 |

Please calculate the correlation coefficient; use the regression to estimate the effectiveness (estimate the value of y) if the advertisement expenses $x = 30$, and estimate the advertisement expenses level (estimate the value of x) for the effectiveness $y = 50$.

| Operation | Display (Upper) | Display (Lower) |
|---|-----------------|-------------------------------|
| MODE MODE 2 > 3 (Quad Regression) | | |
| Shift CLR 1 = ON/CA | | 0. |
| 1 8 , 3 8 Data 3 5 , 5 4 Data 4 0 , 5 9 Data 2 1 , 4 0 Data 1 9 , 3 8 Data | n = | 5. |
| Shift r5-VAR1 > > 1 = (Coefficient A) | A | 23.49058119 |
| Shift r5-VAR1 > > 2 = (Coefficient B) | B | 0.688165819 |
| Shift r5-VAR1 > > 3 = (Coefficient C) | C | 5.067334875x10 ⁻⁰³ |
| 3 0 Shift r5-VAR1 > > > 3 = (\hat{y} when $x = 30$) | 30 \hat{y} | 48.69615715 |
| 5 0 Shift r5-VAR1 > > > 1 = (\hat{x}_1 when $y = 50$) | 50 \hat{x}_1 | 31.30538226 |
| 5 0 Shift r5-VAR1 > > > 2 = (\hat{x}_2 when $y = 50$) | 50 \hat{x}_2 | -167.1096731 |

Distribution Calculations

- After sample data are entered in either Statistic (SD) or Regression (REG) mode, you can perform the normal distribution or probability distribution calculation such as P(t), Q(t) and R(t) in which t is the variate of the probabilistic experiment.



$$t = \frac{x - \bar{x}}{x\sigma_n}$$

x : Random variable




\bar{x} : Mean of sample

$x\sigma_n$: Standard deviation

- Press **Shift** **rDISTR1** will display the following selection screen.

| | | | |
|----|----|----|----|
| P(| Q(| R(| →t |
| 1 | 2 | 3 | 4 |

You can press **1**, **2**, **3** or **4** for the corresponding calculations.

| | |
|---|---|
| <p>P(t): Probability below a given point x</p> | $P(t) = \int_{-\infty}^x \frac{1}{\sigma\sqrt{2\pi}} e^{-\frac{1}{2}\left(\frac{t-\mu}{\sigma}\right)^2} dt,$  |
| <p>Q(t): Probability below a given point x and above the mean</p> | $Q(t) = 0.5 - R(t),$  |
| <p>R(t): Probability above a given point x</p> | $R(t) = 1 - P(t),$  |

Example: Calculate the probability distribution P(t) for the sample data: 20, 43, 26, 46, 20, 43, 26, 19, 23, 20 when x = 26.

| Operation | Display (Upper) | Display (Lower) |
|--|-----------------|-----------------|
| MODE MODE 2 1 (Lin Regression) | | 0. |
| Shift CLR 1 = ON/CA | | 0. |
| 2 0 Data 4 3 Data 2 6 Data 4 6 Data 2 0 Data 4 3 Data 2 6 1 9 Data 2 3 Data 2 0 Data | n = | 10. |
| 2 6 Shift rDISTR 4 = | 26 → t | -0.250603137 |
| Shift rDISTR 1 (-) 0 • 2 5) = | P(-0.25) | 0.40129 |

Permutation, Combination, Factorials and Random Number Generation

- Permutation : $nPr = \frac{n!}{(n-r)}$
- Combination : $nCr = \frac{n!}{r!(n-r)}$
- Factorial : $x! = x(x-1)(x-2)\dots(2)(1)$

| Examples | Operation | Display (Lower) |
|--------------|---|-----------------|
| ${}_{10}P_3$ | $\boxed{1} \boxed{0} \text{Shift} \text{nPr} \boxed{3} \boxed{=}$ | 720. |
| ${}_5C_2$ | $\boxed{5} \text{Shift} \text{nCr} \boxed{2} \boxed{=}$ | 10. |
| $5!$ | $\boxed{5} \text{Shift} \text{x!} \boxed{=}$ | 120 |

Random Number Generation

$\text{Shift} \text{Rand}$: To generate a random number between 0.000 and 0.999 ; the result differ each time with the same possibility of occurrence.

$\text{Alpha} \text{i-Rand}$: To generate a random number between two specified integers. Results differ each time with the same possibility occurrence within a boundary. The entry is divided with " , " .

Example: To generate a random number between 0.000 and 0.999; and generate an integer from range of 1 to 100

| Operation | Display (Upper) | Display (Lower) |
|--|-----------------|-----------------|
| $\text{Shift} \text{Rand} \boxed{=}$ | Rand | 0.833* |
| $\text{Alpha} \text{i-Rand} \boxed{1} \boxed{,} \boxed{1} \boxed{0} \boxed{0} \boxed{=}$ | i-Rand(1,100 | 83.* |

* The value is only a sample, results will differ each time.


EQUATION CALCULATIONS

■ Press $\text{MODE} \text{MODE} \text{MODE} \boxed{1}$ to enter the equation mode and the following selection options will be displayed:


← Unknowns? →

2 3


By this screen, you can choose for the simultaneous linear equation solve with either two (2) or three (3) unknowns. Or press $\text{MODE} \text{MODE}$ or MODE to display another the options for quadratic (2) or cubic (3) equation:



After the equation type is selected, [EQN] indicator lights up. The following equation solve guiding page sample will be shown if you specified the equation solve for two (2) or three (3) unknowns simultaneous linear equation:



- For quadratic or cubic equation solve, the coefficient name starts with "a"
- You cannot input complex number as an coefficient
- The calculation starts after the last factor ("c2": where the simultaneous linear equations with two unknowns, "d3", where the simultaneous linear equations with three unknowns "c" quadratic equation and "d" cubic equation) of the specified equation and then the root of an equation appears.



- The input display appears by pressing the $\boxed{\text{ON/CA}}$ key, and you can display or edit the value by pressing the \uparrow or \downarrow key. After that, the last factor is displayed and a calculation is performed again by pressing $\boxed{\text{=}}$ to display the root.
- For quadratic or cubic equation, the Variable name starts with "X1".
- Press \uparrow \downarrow or $\boxed{\text{=}}$ key to display the equation solve results.
- If you want to return to the coefficient input screen, simply press $\boxed{\text{ON/CA}}$ key.

Simultaneous Linear Equations

Two Unknowns Simultaneous Linear Equation:

$$a_1x + b_1y = c_1$$

$$a_2x + b_2y = c_2$$

Three Unknowns Simultaneous Linear Equation:

$$a_1x + b_1y + c_1z = d_1$$

$$a_2x + b_2y + c_2z = d_2$$

$$a_3x + b_3y + c_3z = d_3$$

Example: Solve the simultaneous equation with three unknowns:

$$2x + 4y - 4z = 20$$

$$2x - 2y + 4z = 8$$

$$5x - 2y - 2z = 20$$

| Operation | Display (Upper) | Display (Lower) |
|-------------------------------|-----------------|-----------------|
| MODE MODE MODE 1 | ← Unknowns? → | 2 3 |
| 3 (3 unknowns) | a1? ↓ | 0. |
| 2 = 4 = (-) 4 = 2 0 = | a2? ↓ | 0. |
| 2 = (-) 2 = 4 = 8 = | a3? ↓ | 0. |
| 5 = (-) 2 = (-) 2 = 2 0 = | x = ↓ | 5.5 |
| ⊙ | y = ↓ | 3. |
| = | z = ▲ | 0.75 |
| CE/C (return to input screen) | a1? ↓ | 2. |

Quadratic or Cubic Equations

Quadratic equation : $ax^2 + bx + c = 0$ (a second-order polynomial equation in a single variable x)

Cubic equation : $ax^3 + bx^2 + cx + d = 0$ (an equation with cubic polynomial)

Example: Solve the cubic equation $5x^3 + 2x^2 - 2x + 1 = 0$

| Operation | Display (Upper) | Display (Lower) |
|------------------------|-------------------------|-----------------|
| MODE MODE MODE 1 | ← Unknowns? → | 2 3 |
| ⊙ | ← Degree? → | 2 3 |
| 3 (Cubic equation) | a? ↓ | 0. |
| 5 = 2 = (-) 2 = 1 = | x1 = ↓ | -1. |
| ⊙ | x2 = $R \leftarrow 1$ ↓ | 0.3 |
| Shift $r \leftarrow 1$ | x2 = $R \leftarrow 1$ ↓ | 0.331662479 i |
| = | x3 = ▲ | 0.3 |
| Shift $r \leftarrow 1$ | x3 = ▲ | -0.331662479 i |

SOLVE FUNCTION


- You can solve any calculation expression as per your needs in COMP mode. Simply input the expression with different variables and press the \square \square key.

Example: A cone of height "h" and base is a circular with radius "r", the volume of the cone will be in the formula:

$$V = \frac{1}{3}\pi r^2 h \quad \left(A = \frac{1}{3}\pi B^2 C \right)$$

So, you can replace the variable "V" by A, variable "r" by "B", and variable "h" by "C".

If the radius is 5cm, cone height is 20cm, calculate the cone volume. And if the cone volume is 200cm³, with radius 2cm, calculate the cone height.



| Operation | Display (Upper) | Display (Lower) |
|---|--------------------------------|-----------------|
| MODE \square 1 | | 0. |
| Alpha A Alpha \square = \square (1 \square a b/c 3 | | |
|) Shift π Alpha B \square x ² Alpha C | A=(1/3) π B ² C | 0. |
| Shift Solve \square \square | A? | 0. |
| \square | B? | 0. |
| 5 \square = (radius is B = 5cm) | C? | 0. |
| 2 0 \square = (height is C = 20cm) | C? | 20. |
| \square \square | A? | 0. |
| Shift Solve \square \square | A = | 523.5987756 |
| \square = (Calculate with new variables) | A ? | 523.5987756 |
| 2 0 0 \square = (volume is A = 200 cm ³) | B? | 5. |
| 2 \square = (radius is B = 2 cm) | C? | 20. |
| Shift Solve \square \square | C = | 47.74648293 |

- ! If the expression does not have the equal sign (=) and perform the Solve calculation, the calculator will transform the solution as zero (0).
- ! When the expression cannot be solved, [Solve ERROR] will be displayed.

CALC FUNCTION

- CALC function is deemed to be a memory zone with maximum 79 steps for you to store a single calculation expression which will be recalled and calculated a number of times by different values.
- After input the calculation expression and pressed **CALC**, the calculator will request for the current value of your input variables.
- Beware that CALC function can only be used in COMP mode or CPLX mode.

Example: For the equation $Y = 5x^2 - 2x + 1$, calculate the value of Y if $x = 5$ or $x = 7$.

| Operation | Display (Upper) | Display (Lower) |
|--|---------------------|-----------------|
| Alpha Y Alpha = 5 Alpha X x^2 - 2 Alpha X + 1 | $Y = 5x^2 - 2x + 1$ | 0. |
| CALC | X? | 0. |
| 5 = | $Y = 5x^2 - 2x + 1$ | 116. |
| CALC 7 = | $Y = 5x^2 - 2x + 1$ | 232. |

! The **CALC** stored expression will be cleared as you start a new calculation, change into another mode, or turn off the calculator.

DIFFERENTIAL CALCULATIONS

■ Press MODE $\boxed{1}$ to enter COMP mode for differential calculation.

To perform a differential calculation, you have to input the expression in the form of:

$\overset{\text{Shift}}{\boxed{\text{d/dx}}} \overset{\text{d/dx}}{\boxed{\text{differential expression}}} \boxed{,} \boxed{a} \boxed{,} \boxed{\Delta x} \boxed{)}$

- The differential expression must contain the variable x .
- "a" is the differential coefficient.
- " Δx " is the change interval of x (*calculation precision*).

Example: To determine the derivative at point $x = 10$, $\Delta x = 10^{-8}$, for the function $f(x) = \sin(3x + 30)$.

| Operation | Display (Upper) | Display (Lower) |
|---|-----------------|-----------------|
| $\overset{\text{Shift}}{\boxed{\text{d/dx}}} \boxed{\sin} \boxed{(} \boxed{3} \overset{\text{Alpha}}{\boxed{X}}$ $\boxed{+} \boxed{3} \boxed{0} \boxed{)} \boxed{,} \boxed{1} \boxed{0} \boxed{,}$ $\boxed{1} \boxed{\text{EXP}} \boxed{(-)} \boxed{8} \boxed{)} \boxed{=}$ | d/dx (sin (3x | 0.026179938 |

- ! You can leave out the Δx in the differential expression and the calculator will automatically substitute a value for Δx .
- ! The smaller the entered value Δx is, the longer the calculation time will be and the result is more accurate; the bigger the entered value Δx is, the shorter the calculation time will be and the result will be comparatively less accurate.
- ! Discontinuous points and extreme changes in the value of x can cause inaccurate results or errors.
- ! When performing differential calculation with trigonometric function, select radian (Rad) as the angle unit setting.
- ! $\text{Log}_a b$, $i\sim\text{Rand}$, $\text{Rec}()$ and $\text{Pol}()$ functions can't join to differential calculation.
- ! During the busy calculation, the calculator will display the message [PROCESSING]

INTEGRATION CALCULATIONS

- Press MODE $\boxed{1}$ to enter COMP mode for integration calculation.

To perform an integration calculation you are required to input following elements:

$$\int dx \text{ integration expression } \boxed{,} \boxed{a} \boxed{,} \boxed{b} \boxed{,} \boxed{n} \boxed{)}$$

- The integration expression has variable x.
 - "a" and "b" defining the integration range of the definite integral.
 - "n" is the number of partitions (equivalent to $N = 2^n$).
- The integration calculation is based on Simpson's rule.

$$\int_a^b f(x)dx, n = 2^n, 1 \leq n \leq 9, n \neq 0$$

As the number of significant digits is increased, internal integration calculations may take considerable time to complete. For some cases, even after considerable time is spent for performing a calculation, the calculation results may be erroneous. Particularly when significant digits are less than 1, an ERROR might be occurred.

Example: Perform the integration calculation for

$$\int_2^3 (5x^4 + 3x^2 + 2x + 1)dx, \text{ with } n = 4.$$

| Operation | Display (Upper) | Display (Lower) |
|---|------------------------------|-----------------|
| $\int dx$ $\boxed{5}$ Alpha \boxed{X} $\boxed{\wedge}$ $\boxed{4}$ $\boxed{+}$ $\boxed{3}$ Alpha \boxed{X} $\boxed{\wedge}$ $\boxed{2}$ $\boxed{+}$ $\boxed{2}$ Alpha \boxed{X} $\boxed{+}$ $\boxed{1}$ $\boxed{,}$ $\boxed{2}$ $\boxed{,}$ $\boxed{3}$ $\boxed{,}$ $\boxed{4}$ $\boxed{)} =$ | $\int (5 X ^ 4 + 3 X ^ 2 +$ | 236. |


- ! The number of partitions (n) have to specify in the range of 1 to 9 integer, any value that out of the setup division range ($N=2^n, n \neq 0, n=1\sim 9$ integer), [Arg ERROR] will be displayed.
- ! You can skip the number of partitions entirely and the calculator will automatically assign an appropriate value on behalf of you.
- ! The smaller the value of n is, the shorter the calculation time is, but the result is comparatively less accurate; on the other hand, the bigger the n is, the longer the calculation time is, and the result is more accurate.
- ! When performing integration calculation with trigonometric function, select radian (Rad) as the angle unit setting.
- ! $\text{Log}_a b, i\sim\text{Rand}, \text{Rec}()$ and $\text{Pol}()$ functions can't join to integration calculation.
- ! During the busy calculation, the calculator will display the message [PROCESSING].

MATRIX CALCULATIONS

- Enter the matrix mode by pressing $\boxed{\text{MODE}} \boxed{\text{MODE}} \boxed{\text{MODE}} \boxed{2}$, and [MATX] indicator lights up.
- Before you start matrix calculations, you have to create one matrix or maximum three matrices which named A, B, and C at one time.
- The matrix calculation results are stored into MatAns memory automatically. You can use the matrix MatAns memory for any subsequent matrix calculations.
- Matrix calculation may use up to two levels matrix stack; however, squaring a matrix, cubing a matrix, or inverting a matrix only use one stack.

Create a Matrix

1. Press $\boxed{\text{Shift}} \boxed{\text{rMATX}} \boxed{1}$ (Dim) to specify the matrix name (A, B or C), and then specify the dimension (number of rows and number of columns) of the matrix. The dimension of matrix can be up to 3 x 3.
2. Next, input the value (element) of the matrix according to the matrix element indicator display, following is a matrix element indicator example:



3. Use the cursor keys to move, view or edit the matrix elements.
4. When finished the input, press $\boxed{\text{ON/CA}}$ to exit the matrix creation screen.

Edit Matrix Elements

1. Press $\boxed{\text{Shift}} \boxed{\text{rMATX}} \boxed{2}$ (Edit), then specify the matrix A, B or C for editing and the corresponding matrix element indicator will be displayed.
2. Input the new value and press $\boxed{\text{=}}$ to confirm the edit.
3. When finished the input, press $\boxed{\text{ON/CA}}$ to exit the matrix editing screen.

Matrix Addition, Subtraction and Multiplication

Example: $MatA = \begin{pmatrix} 1 & 2 & 3 \\ 4 & 5 & 6 \\ 7 & 8 & 9 \end{pmatrix}$, $MatB = \begin{pmatrix} 9 & 8 & 7 \\ 6 & 5 & 4 \\ 3 & 2 & 1 \end{pmatrix}$, $MatA \times MatB = ?$

| Operation | Display (Upper) | Display (Lower) |
|---|----------------------|-----------------|
| Shift \overline{r} \overline{m} \overline{a} \overline{x} 1 1 (Matrix A 3 x 3) | MatA(mxn) m? | 0. |
| 3 = 3 = (Matrix A 3 x 3) | MatA ₁₁ | 0. |
| 1 = 2 = 3 = 4 = 5 = 6 = 7 = 8 = 9 = (Input Element) | MatA ₁₁ | 1. |
| Shift \overline{r} \overline{m} \overline{a} \overline{x} 1 2 (Matrix B 3 x 3) 3 = 3 = | MatB ₁₁ | 0. |
| 9 = 8 = 7 = 6 = 5 = 4 = 3 = 2 = 1 = (Input Element) | MatB ₁₁ | 9. |
| ON/CA Shift \overline{r} \overline{m} \overline{a} \overline{x} 3 | A B C Ans | 1 2 3 4 |
| 1 x | MatA x | 0. |
| Shift \overline{r} \overline{m} \overline{a} \overline{x} 3 2 | MatA x MatB | 0. |
| = | MatAns ₁₁ | 30. |
| ➤ (press left, right, up or down key to display the result) | MatAns ₁₂ | 24. |

Obtain the Scalar Product of a Matrix

Each position in the matrix is multiplied by a single value, resulting in a matrix of the same size. Following procedures show you how to obtain the scalar product of a matrix with the fixed multiple:

Example: Multiple Matrix C = $\begin{pmatrix} 3 & -2 \\ -1 & 5 \end{pmatrix}$ by 2 <Result: $\begin{pmatrix} 6 & -4 \\ -2 & 10 \end{pmatrix}$ >

| Operation | Display (Upper) | Display (Lower) |
|--|----------------------|-----------------|
| Shift $\frac{r}{MDC}$ 1 3 | MatC(mxn) m? | 0. |
| 2 = 2 = (Matrix C 2x2) | MatC ₁₁ | 0. |
| 3 = (-) 2 = (-) 1 = 5 = (Input Element) | MatC ₁₁ | 3. |
| ON/CA 2 x Shift $\frac{r}{MDC}$ 3 3 | 2 x MatC | 0. |
| = (2 x MatC) | MatAns ₁₁ | 6. |
| ➤ | MatAns ₁₂ | -4 |
| ➤ | MatAns ₂₁ | -2 |
| ➤ | MatAns ₂₂ | 10. |

Obtain the Determinant of a Matrix

Following procedures show you how to obtain the determinant of a square matrix:

Example: Obtain the determinant of Matrix C = $\begin{pmatrix} 10 & -5 & 3 \\ -4 & 9 & 2 \\ 1 & 7 & -3 \end{pmatrix}$
<Result: -471>

| Operation | Display (Upper) | Display (Lower) |
|---|--------------------|-----------------|
| Shift $\frac{r}{MDC}$ 1 3 (Dim) 3 = | MatC ₁₁ | 0. |
| 3 = (Matrix C 3x3) | | |
| 1 0 = (-) 5 = 3 = (-) 4 = 9 = 2 = 1 = 7 = (-) 3 = (Input Element) | MatC ₁₁ | 10. |
| ON/CA Shift $\frac{r}{MDC}$ ➤ | Det Trn | 1 2 |
| 1 Shift $\frac{r}{MDC}$ 3 3 (DetMatC) | Det MatC | 0. |
| = | Det MatC | -471. |

! An error occurs if you obtain the determinant of a non-square matrix.

Transpose a Matrix

Following procedures show you how to transpose a matrix:

Example: Transpose Matrix $B = \begin{pmatrix} 9 & 5 \\ 6 & 2 \\ 8 & 4 \end{pmatrix}$ <Result: $\begin{pmatrix} 9 & 6 & 8 \\ 5 & 2 & 4 \end{pmatrix}$ >

| Operation | Display (Upper) | Display (Lower) |
|---|----------------------|-----------------|
| Shift $\overline{\text{rMATH}}$ 1 2 (Dim) 3 = 2 = (Matrix B 3x2) | MatB ₁₁ | 0. |
| 9 = 5 = 6 = 2 = 8 = 4 = (Input Element) | MatB ₁₁ | 9. |
| ON/CA Shift $\overline{\text{rMATH}}$ > | Det Trn | 1 2 |
| 2 Shift $\overline{\text{rMATH}}$ 3 2 (Trn MatB) | Trn MatB | 0. |
| = (press left, right, up or down key to display the result) | MatAns ₁₁ | 9. |

Invert a Matrix

Following procedures show you how to invert a square matrix:

Example: Inverting Matrix $C = \begin{pmatrix} 8 & 2 \\ 3 & 6 \end{pmatrix}$

< Result: $\begin{pmatrix} \frac{1}{7} & -\frac{1}{21} \\ -\frac{1}{14} & \frac{4}{21} \end{pmatrix}$ >

| Operation | Display (Upper) | Display (Lower) |
|---|----------------------|-----------------|
| Shift $\overline{\text{rMATH}}$ 1 3 (Dim) 2 = 2 = (Matrix C 2x2) | MatC ₁₁ | 0. |
| 8 = 2 = 3 = 6 = (Input Element) | MatC ₁₁ | 8. |
| ON/CA Shift $\overline{\text{rMATH}}$ 3 3 x^{-1} | MatC ⁻¹ | 0. |
| = (MatC ⁻¹) | MatAns ₁₁ | 1 J 7. |
| > | MatAns ₁₂ | -1 J 21. |
| > | MatAns ₂₁ | -1 J 14. |
| > | MatAns ₂₂ | 4 J 21. |

Determine the Absolute value of a Matrix

Following procedures show you how to determine the absolute value of a matrix:

Example: To determine the absolute value of the inverted Matrix C in the previous example.


| Operation | Display (Upper) | Display (Lower) |
|--|----------------------|-----------------|
| Shift $\frac{\square}{\text{Abs}}$ Shift $\frac{\square}{\text{MATC}}$ $\frac{\square}{3}$ $\frac{\square}{4}$ | Abs MatAns | 0. |
| $\frac{\square}{=}$ | MatAns ₁₁ | 1 J 7 |
| $\frac{\square}{\rightarrow}$ | MatAns ₁₂ | 1 J 21 |
| $\frac{\square}{\rightarrow}$ | MatAns ₂₁ | 1 J 14 |
| $\frac{\square}{\rightarrow}$ | MatAns ₂₂ | 4 J 21 |

VECTOR CALCULATIONS

- Enter the vector mode by pressing $\frac{\text{MODE}}{\square}$ $\frac{\text{MODE}}{\square}$ $\frac{\text{MODE}}{\square}$ $\frac{\square}{3}$, and [VCTR] indicator lights up.
- Before you start vector calculations, you have to create one or more vector which named A, B, or C (maximum three vectors at one time).
- The vector calculation results are stored into VctAns memory automatically. You can use the vector VctAns memory for any subsequent vector calculations.

Create a Vector

1. Press $\frac{\text{Shift}}{\square}$ $\frac{\text{rVCTR}}{\square}$ $\frac{\square}{1}$ (Dim) to specify the vector name (A, B or C), and then specify the dimension of the vector.
2. Next, input the value (element) of the vector according to the vector element indicator display, following is a vector element indicator example:



3. Use the cursor keys to move, view or edit the vector elements.
4. When finished the input, press $\frac{\text{ON/CA}}{\square}$ to exit the vector creation screen.

Edit Vector Elements

1. Press $\frac{\text{Shift}}{\square}$ $\frac{\text{rVCTR}}{\square}$ $\frac{\square}{2}$ (Edit), then specify the vector A, B or C for editing and the corresponding vector element indicator will be displayed.
2. Input the new value and press $\frac{\square}{=}$ to confirm the edit.
3. When finished the input, press $\frac{\text{ON/CA}}{\square}$ to exit the vector editing screen.

Vector Addition and Subtraction

Following procedures show you how to add or subtract vectors:

Example: Vector A = (9,5), Vector B = (7,3), Vector A – Vector B =?

| Operation | Display (Upper) | Display (Lower) |
|---|---------------------|-----------------|
| Shift $\sqrt{\square}$ 1 1 (Create Vector A) | VctA(m) m? | 0. |
| 2 = (Vector A dimension is 2) | VctA ₁ | 0. |
| 9 = 5 = (Input Element) | VctA ₁ | 9. |
| Shift $\sqrt{\square}$ 1 2 (Create Vector B) | | |
| 2 = | VctB ₁ | 0. |
| 7 = 3 = (Input Element) | VctB ₁ | 7. |
| ON/CA Shift $\sqrt{\square}$ 3 1 - Shift $\sqrt{\square}$ | | |
| 3 2 | VctA - VctB | 0. |
| = | VctAns ₁ | 2. |
| ➤ | VctAns ₂ | 2. |

! An error occurs if you try to add or subtract vectors whose dimensions are different from each other. For example Vector A (a,b,c) cannot add or subtract with Vector B (d,e).

Obtain the Scalar Product of a Vector

Each position in the vector is multiplied by a single value, resulting in a vector of the same size.

$$s \times \text{VctA}(a,b) = \text{VctB}(axs, bxs)$$

Following procedures show you how to obtain the scalar product of a vector with the fixed multiple.

Example: To Multiply Vector C = (4,5,-6) by 5

| Operation | Display (Upper) | Display (Lower) |
|--|---------------------|-----------------|
| Shift $\sqrt{\square}$ 1 3 (Create Vector C) | VctC(m) m? | 0. |
| 3 = | VctC ₁ | 0. |
| 4 = 5 = (-) 6 = (Input Element) | VctC ₁ | 4. |
| ON/CA 5 x Shift $\sqrt{\square}$ 3 3 | 5 x VctC | 0. |
| = (5 x VctC) | VctAns ₁ | 20. |
| ➤ | VctAns ₂ | 25. |
| ➤ | VctAns ₃ | -30. |

Calculate the Inner Product of Two Vectors

Following procedures show you how to calculate the inner product of two vectors.

Example: Calculate the inner product of Vector A and Vector B. As Vector A = (4,5,-6) and Vector B = (-7,8,9), and the both vectors are already created in the calculator.

| Operation | Display (Upper) | Display (Lower) |
|--|-------------------|-----------------|
| ON/CA Shift $\overline{\text{VCT}} \quad 3 \quad 1$ (Recall Vector A) | VctA | 0. |
| Shift $\overline{\text{VCT}} \quad \rightarrow$ | Dot | 1 |
| $\boxed{1}$ | VctA \cdot | 0. |
| Shift $\overline{\text{VCT}} \quad 3 \quad 2$ | VctA \cdot VctB | 0. |
| $\boxed{=}$ (VctA \cdot VctB) | VctA \cdot VctB | -42. |

Calculate the Outer Product of Two Vectors

Following procedures show you how to calculate the outer product of two vectors.

Example: Calculate the outer product of Vector A and Vector B. As Vector A = (4,5,-6) and Vector B = (-7,8,9), and the both vectors are already created in the calculator.

| Operation | Display (Upper) | Display (Lower) |
|--|---------------------|-----------------|
| ON/CA Shift $\overline{\text{VCT}} \quad 3 \quad 1$ (Recall Vector A) | VctA | 0. |
| $\boxed{\times}$ | VctA x | 0. |
| Shift $\overline{\text{VCT}} \quad 3 \quad 2$ | VctA x VctB | 0. |
| $\boxed{=}$ (VctA x VctB) | VctAns ₁ | 93. |
| \rightarrow | VctAns ₂ | 6. |
| \rightarrow | VctAns ₃ | 67. |

! An error occurs if you try to obtain an inner or outer product of two vectors whose dimensions are different from each other.

Determine the Absolute value of a Vector

Following procedures show you how to determine the absolute value (size) of a vector:

Example: To determine the absolute value of the Vector C. As Vector C = (4,5,-6) and already created in the calculator.

| Operation | Display (Upper) | Display (Lower) |
|---|-----------------|-----------------|
| Shift $\frac{\square}{\square}$ $\frac{\square}{\square}$ Shift $\frac{\square}{\square}$ $\frac{\square}{\square}$ 3 3 | Abs VctC | 0. |
| $\frac{\square}{\square}$ | Abs VctC | 8.774964387 |

Example: Base on Vector A=(-1, -2, 0) and Vector B=(1, 0, -1), determine the size of the angle (angle unit: Deg) and the size 1 vector perpendicular to both A and B.

$$\cos \theta = \frac{(A \cdot B)}{|A||B|}, \text{ whereas } \theta = \cos^{-1} \frac{(A \cdot B)}{|A||B|}$$

$$\text{Size 1 vector perpendicular to both A and B} = \frac{A \times B}{|A \times B|}$$

$$\text{Result: } \frac{\text{VctA} \times \text{VctB}}{|\text{VctA} \times \text{VctB}|} = \left(\frac{2}{3}, -\frac{1}{3}, \frac{2}{3} \right)$$

| Operation | Display (Upper) | Display (Lower) |
|--|---------------------|-----------------|
| Shift $\frac{\square}{\square}$ $\frac{\square}{\square}$ 1 1 3 $\frac{\square}{\square}$ (Create Vector A) | VctA ₁ | 0. |
| (-) 1 $\frac{\square}{\square}$ (-) 2 $\frac{\square}{\square}$ 0 $\frac{\square}{\square}$ (Input Elements) | VctA ₁ | -1. |
| Shift $\frac{\square}{\square}$ $\frac{\square}{\square}$ 1 2 3 $\frac{\square}{\square}$ (Create Vector B) | VctB ₁ | 0. |
| 1 $\frac{\square}{\square}$ 0 $\frac{\square}{\square}$ (-) 1 $\frac{\square}{\square}$ (Input Elements) | VctB ₁ | 1. |
| ON/CA Shift $\frac{\square}{\square}$ $\frac{\square}{\square}$ 3 1 Shift $\frac{\square}{\square}$ $\frac{\square}{\square}$ > 1 Shift $\frac{\square}{\square}$ $\frac{\square}{\square}$ 3 2 $\frac{\square}{\square}$ (VctA \cdot VctB) | VctA \cdot VctB | -1. |
| $\frac{\square}{\square}$ (Shift $\frac{\square}{\square}$ $\frac{\square}{\square}$ Shift $\frac{\square}{\square}$ $\frac{\square}{\square}$ 3 1 \times Shift $\frac{\square}{\square}$ $\frac{\square}{\square}$ Shift $\frac{\square}{\square}$ $\frac{\square}{\square}$ 3 2) $\frac{\square}{\square}$ (calculate $\frac{\text{VctA} \cdot \text{VctB}}{ \text{VctA} \times \text{VctB} }$) | Ans \div (Abs Vct | -0.316227766 |
| Shift $\frac{\square}{\square}$ $\frac{\square}{\square}$ Ans $\frac{\square}{\square}$ (calculate = $\cos^{-1} \frac{(A \cdot B)}{ A B }$) | \cos^{-1} Ans | 108.4349488 |
| Shift $\frac{\square}{\square}$ $\frac{\square}{\square}$ 3 1 \times Shift $\frac{\square}{\square}$ $\frac{\square}{\square}$ 3 2 $\frac{\square}{\square}$ (calculate VctA \times VctB = (2, -1, 2)) | VctAns ₁ | 2. |
| Shift $\frac{\square}{\square}$ $\frac{\square}{\square}$ Shift $\frac{\square}{\square}$ $\frac{\square}{\square}$ 3 4 $\frac{\square}{\square}$ (calculate VctA \times VctB) | Abs VctAns | 3. |
| Shift $\frac{\square}{\square}$ $\frac{\square}{\square}$ 3 4 \div Ans $\frac{\square}{\square}$ (Calculate $\frac{\text{VctA} \times \text{VctB}}{ \text{VctA} \times \text{VctB} } =$) | VctAns ₁ | 2 J 3. |
| > | VctAns ₂ | -1 J 3. |
| > | VctAns ₃ | 2 J 3. |

BATTERY REPLACEMENT

Replace the battery immediately when the display characters are dim even a darker LCD contrast **OR** when the following message appears on the screen. Turn the calculator off and replace the alkaline battery immediately.

L O W B A T T E R Y

Please replace the alkaline battery with the following procedures,

1. Press $\overset{\text{Shift}}{\square}$ $\overset{\text{OFF}}{\square}$ to power off the calculator.
2. Remove the screw that securely fixes the battery cover in place.
3. Remove battery cover.
4. Remove the old battery with the tip of a ball pen or similar sharp object.
5. Load the new battery with the positive "+" side facing up.
6. Replace the battery cover, screw, and press $\overset{\text{ON/CA}}{\square}$ $\overset{\text{Shift}}{\square}$ $\overset{\text{CLR}}{\square}$ \square 3
 \square $\overset{\text{ON/CA}}{\square}$ the reset button to initialize the calculator.



Caution: Do not use the battery other than the specified one. Failure to do so may burst the battery, causing environment contamination or personal injury due to electrolyte leakage.

Insulate the positive and negative poles of the spent battery with a tape, follow your local environment regulations and waste disposal standards, and then dispose the battery.



Battery Cautions

- Keep the battery out of reach of children. If the battery is swallowed, contact a doctor immediately.
- Misuse of battery may cause leakage, explosion, damages or personal injury.
- Don't recharge or disassemble the battery, it could cause a short circuit.
- Never expose the battery to high temperatures, direct heat, or dispose by incineration.

SPECIFICATIONS

- Power Supply : Solar cell and single Alkaline battery
(LR44 x 1)
- Power Consumption : D.C. 1.5V / 0.1mW
- Battery Life : Approximately 3 years
(Base on 1 hour of operation per day)
- Auto Power Off : Approx. 7 minutes
- Usable Temperature : 0 ~ 40°C
- Size : 165 (L) x 80 (W) x 14 (H) mm (body)
168 (L) x 86 (W) x 17.8 (H) mm (with case)
- Weight : 89 g (body) / 127 g (with case)
- * Specifications are subject to change without notice.

CANON ELECTRONIC BUSINESS MACHINES (H.K.) CO., LTD.

17/F., Tower One, Ever Gain Plaza,
82-100 Container Port Road, Kwai Chung,
New Territories, Hong Kong

CANON MARKETING (MALAYSIA) SDN BHD.

Block D, Peremba Square, Saujana Resort, Section U2,
40150 Shah Alam, Selangor Darul Ehsan, Malaysia

PUB NO. E-IE-483

Made in China / Printed in China

© CANON ELECTRONIC BUSINESS MACHINES (H.K.) CO., LTD. 2016